


# CT-44-1

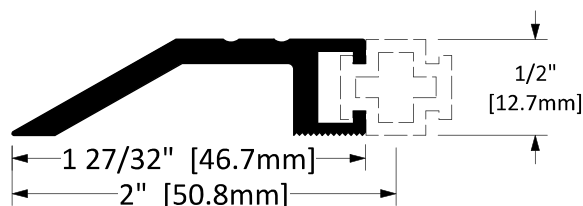

<b>Operation</b>	Thermal Break Threshold
<b>Features</b>	<ul style="list-style-type: none"> <li>• Mill Finish Extruded Aluminum</li> <li>• Insert not included</li> </ul>
<b>Application</b>	<ul style="list-style-type: none"> <li>• Ideal for Residential, Commercial &amp; Industrial</li> </ul>

Customer Name: \_\_\_\_\_ Job No./Name: \_\_\_\_\_ Date: \_\_\_\_\_

Notes: \_\_\_\_\_

- Finish Options**
- STD** Mill Finish
- OPT** Bronze Anodized
- OPT** Black Anodized
- OPT** Clear Anodized
- Screw Options**
- Standard**
- Screw Type: G**  
 3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey Phillips Drive, Concrete Screws (5/32" Pre-Drill Required)
- Optional**
- Screw Type: H**  
 #10 X 1-3/4" Stainless Steel Flat Head, Robertson Drive, Type A Screws (Complete With Nylon Anchor)
- Screw Type: I**  
 #10 X 2" Stainless Steel Flat Head, Tamper-Resistant Torx Drive, Type A Screws (Complete With Nylon Anchor)

Provided By: \_\_\_\_\_