

CT-44



STD

Finish Options

Mill Finish

Screw Options

Standard



Screw Type: **G**
3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey
Phillips Drive, Concrete Screws
(5/32" Pre-Drill Required)


Optional



Screw Type: **H**
#10 X 1-3/4" Stainless Steel Flat Head,
Robertson Drive, Type A Screws
(Complete With Nylon Anchor)



Screw Type: **I**
#10 X 2" Stainless Steel Flat
Head, Tamper-Resistant Torx
Drive, Type A Screws
(Complete With Nylon Anchor)

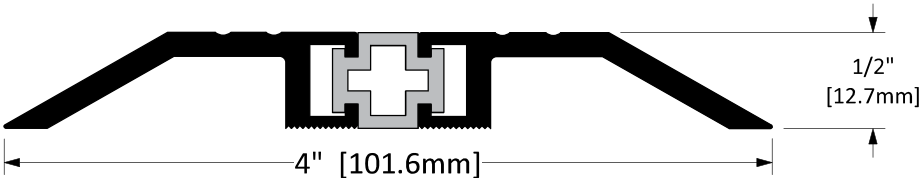

Operation	Thermal Break Threshold
Features	<ul style="list-style-type: none">• Mill Finish Extruded Aluminum• Insert included
Application	<ul style="list-style-type: none">• Ideal for Residential, Commercial & Industrial

Customer Name:	Job No./Name:	Date:
<hr/>	<hr/>	<hr/>

Provided By:

Notes: