


CT-49S

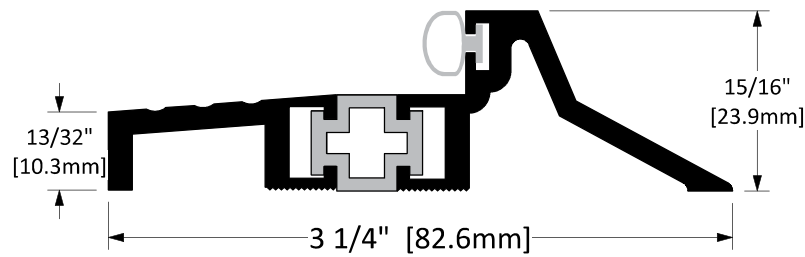

| | |
|--------------------|--|
| Operation | Thermal Break Threshold |
| Features | <ul style="list-style-type: none"> • Mill Finish Extruded Aluminum with Silicone • Insert included |
| Application | <ul style="list-style-type: none"> • Ideal for Residential, Commercial & Industrial |

Customer Name: _____ Job No./Name: _____ Date: _____

Notes: _____

STD Finish Options
Mill Finish


Screw Options

Standard




Screw Type: **G**
3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey Phillips Drive, Concrete Screws (5/32" Pre-Drill Required)

Optional



Screw Type: **H**
#10 X 1-3/4" Stainless Steel Flat Head, Robertson Drive, Type A Screws (Complete With Nylon Anchor)



Screw Type: **I**
#10 X 2" Stainless Steel Flat Head, Tamper-Resistant Torx Drive, Type A Screws (Complete With Nylon Anchor)