


CT-50F

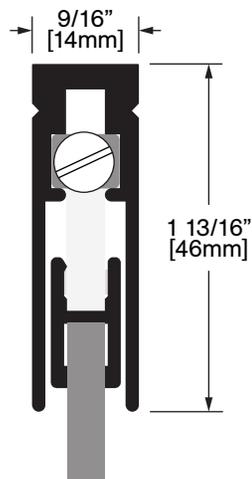

Operation: Automatic Door Bottom

Features: Clear Anodized Extruded Aluminum with Felt
Maximum effective drop: 5/8 in (15.9mm)

Application: Ideal for Residential, Commercial & Industrial

Customer Name _____

Job No./Name _____

Date _____

Provided By: _____

Notes

FINISHES

STD

Clear Anodized

Bronze Anodized


OPT

Black Anodized

Special _____

SCREW OPTIONS


Standard



Screw Type: J

#10 X 1-1/2" Stainless Steel Truss Head,
Robertson Drive, Type A Screws

Optional



Screw Type: K

#10 X 1-1/2" Stainless Steel Button
Head, Tamper-Resistant Torx
Drive, Type A Screws