


# CT-51F

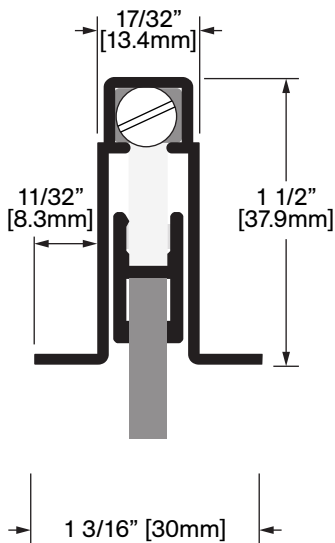

**Operation:** Automatic Door Bottom  
**Features:** Mill Finish Extruded Aluminum with Felt  
 Maximum effective drop: 5/8 in (15.9mm)  
**Application:** Ideal for Residential, Commercial & Industrial

|                  |              |      |              |
|------------------|--------------|------|--------------|
| Customer Name    | Job No./Name | Date | Provided By: |
| <div>Notes</div> |              |      |              |

## FINISHES


- STD

Mill Finish
- OPT


Black Anodized
- Special \_\_\_\_\_

## SCREW OPTIONS

- Standard



Screw Type: N  
 #6 X 3/4" Stainless Steel Truss Head,  
 Robertson Drive, Type A Screws
- Optional



Screw Type: O  
 #6 X 3/4" Stainless Steel Button  
 Head, Tamper-Resistant Torx  
 Drive, Type A Screws