


CT-52S

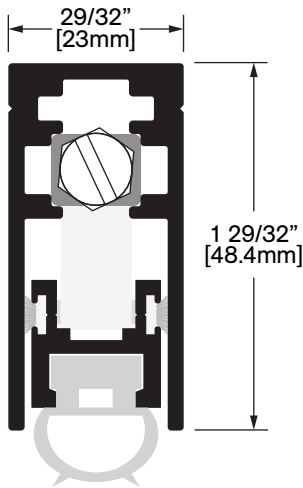

Operation: Automatic Door Bottom
Features: Clear Anodized Extruded Aluminum with Silicone
Maximum effective drop: 11/16 in (17.5mm)
Application: Ideal for Residential, Commercial & Industrial

STD

OPT


FINISHES

- Clear Anodized
- Bronze Anodized
- Black Anodized
- Special _____

Standard

Optional

SCREW OPTIONS



Screw Type: J
#10 X 1-1/2" Stainless Steel Truss Head,
Robertson Drive, Type A Screws



Screw Type: K
#10 X 1-1/2" Stainless Steel Button
Head, Tamper-Resistant Torx
Drive, Type A Screws

Customer Name	Job No./Name	Date	Provided By:
_____	_____	_____	_____
Notes			