


CT-53S

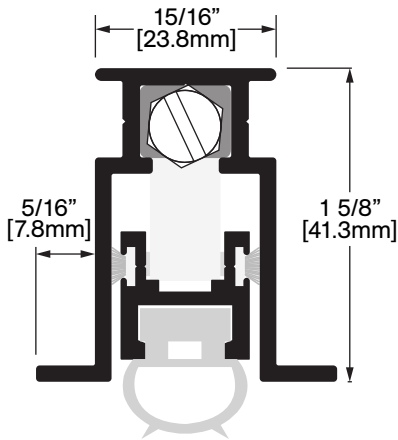


Operation: Automatic Door Bottom
Features: Mill Finish Extruded Aluminum with Silicone
 Maximum effective drop: 11/16 in (17.5mm)
Application: Ideal for Residential, Commercial & Industrial

STD
OPT

FINISHES


- Mill Finish
- Black Anodized
- Special _____

Standard



Screw Type: N
 #6 X 3/4" Stainless Steel Truss Head,
 Robertson Drive, Type A Screws

Optional



Screw Type: O
 #6 X 3/4" Stainless Steel Button
 Head, Tamper-Resistant Torx
 Drive, Type A Screws

Customer Name	Job No./Name	Date	Provided By:
_____	_____	_____	_____
Notes			