


CT-53S

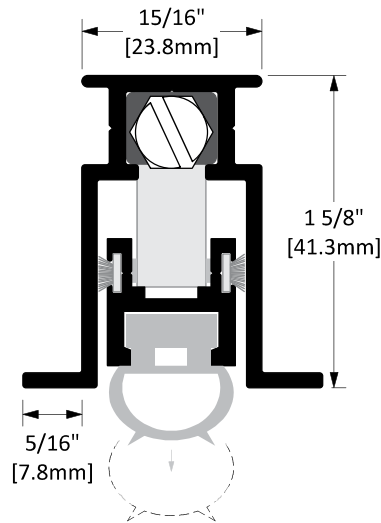

| | |
|-------------|--|
| Operation | Automatic Door Bottom |
| Features | <ul style="list-style-type: none"> Mill Finish Extruded Aluminum with Silicone Maximum effective drop: 11/16" (17.5mm) |
| Application | <ul style="list-style-type: none"> Ideal for Residential, Commercial & Industrial |

Customer Name:

Job No./Name:

Date:

Provided By:

Notes:


OPTSTD

Finish Options

- Mill Finish
- Black Anodized


Standard

Screw Options



Screw Type: **N**
#6 X 3/4" Stainless Steel Truss Head,
Robertson Drive, Type A Screws

Optional



Screw Type: **O**
#6 X 3/4" Stainless Steel Button
Head, Tamper-Resistant Torx
Drive, Type A Screws