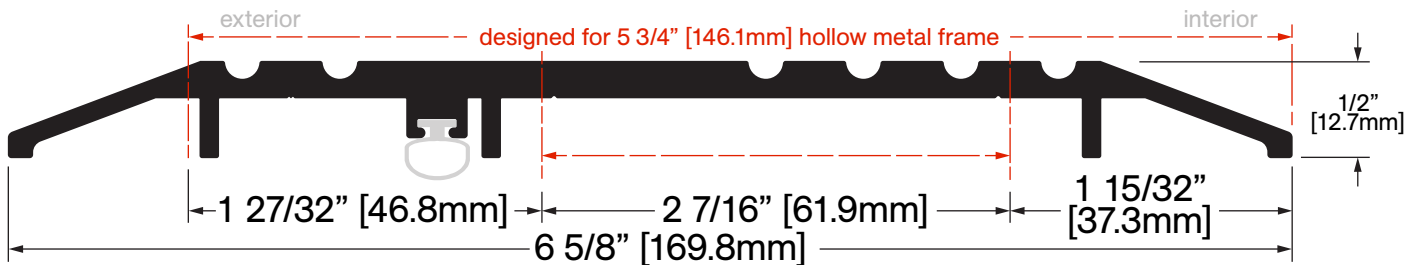


# CT-658 NEW






**Operation:** Automatic Door Bottom Threshold  
**Features:** Mill Finish Extruded Aluminum  
**Application:** Ideal for Residential, Commercial & Industrial  
 Ideal for use with openings with Automatic Door Bottoms on flat surface of threshold  
 Ideal for use with 5-3/4" Hollow Metal Frames  
**Maximum Length:** 192 in [4877 mm]

## FINISHES

- STD** Mill Finish
- OPT** Bronze Anodized
- OPT** Black Anodized
- Special** \_\_\_\_\_

## SCREW OPTIONS

- Standard**
-  Screw Type: G  
 3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey Phillips Drive, Concrete Screws (5/32" pre-drill required)
- Optional**
-  Screw Type: H  
 #10 X 1-3/4" Stainless Steel Flat Head, Robertson Drive, Type A Screws (complete with nylon anchor)
-  Screw Type: I  
 #10 X 2" Stainless Steel Flat Head, Tamper-Resistant Torx Drive, Type A Screws (complete with nylon anchor)

Customer Name	Job No./Name	Date	Provided By:
_____	_____	_____	_____
Notes			