


CT-658

NEW



KNC

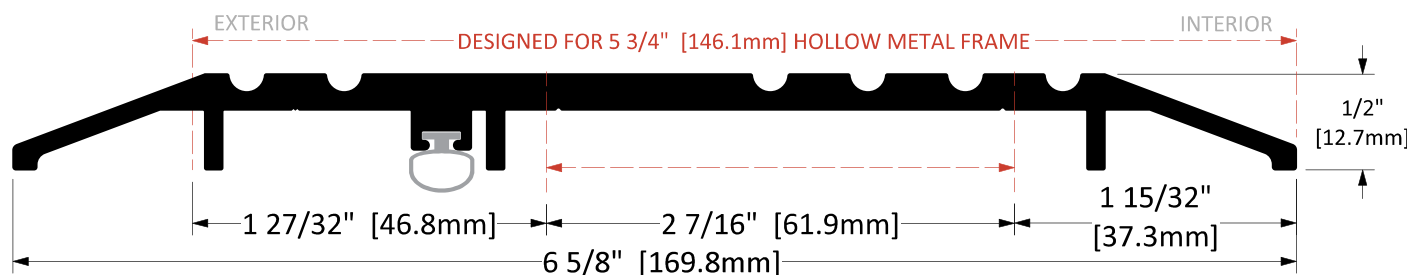

Finish Options

STD

Mill Finish


OPT

Bronze Anodized

Black Anodized


Screw Options

Standard




Screw Type: **G**
3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey Phillips Drive, Concrete Screws (5/32" Pre-Drill Required)

Optional



Screw Type: **H**
#10 X 1-3/4" Stainless Steel Flat Head, Robertson Drive, Type A Screws (Complete With Nylon Anchor)



Screw Type: **I**
#10 X 2" Stainless Steel Flat Head, Tamper-Resistant Torx Drive, Type A Screws (Complete With Nylon Anchor)

Operation	Automatic Door Bottom Threshold
Features	Mill Finish Extruded Aluminum
Application	Ideal for Residential, Commercial & Industrial Ideal for use with openings with Automatic Door Bottoms on flat surface of threshold Ideal for use with 5-3/4" Hollow Metal Frames

Customer Name:	Job No./Name:	Date:

Provided By: _____

Notes:

KN Crowder

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3
T. 1-866-999-1562 customerservice@kncrowder.com kncrowder.com
© 2020-2022 K.N. Crowder Mfg. Inc. All Rights Reserved.