

CT-65F



STD

Finish Options

Clear Anodized


Standard

Screw Options




Screw Type: G
3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey
Phillips Drive, Concrete Screws
(5/32" Pre-Drill Required)


Optional



Screw Type: H
#10 X 1-3/4" Stainless Steel Flat Head,
Robertson Drive, Type A Screws
(Complete With Nylon Anchor)



Screw Type: I
#10 X 2" Stainless Steel Flat
Head, Tamper-Resistant Torx
Drive, Type A Screws
(Complete With Nylon Anchor)

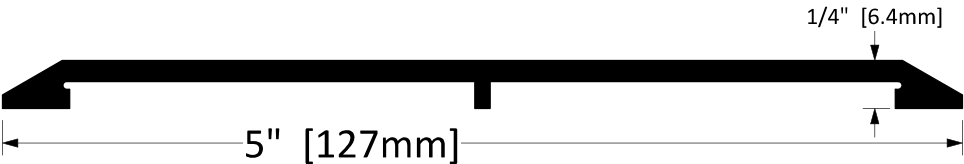

Operation	Threshold
Features	Clear Anodized Extruded Aluminum
Application	Ideal for use with Automatic Door Bottom Ideal for Residential, Commercial & Industrial

Customer Name:	Job No./Name:	Date:
<hr/>	<hr/>	<hr/>

Provided By:

Notes: