


CT-76

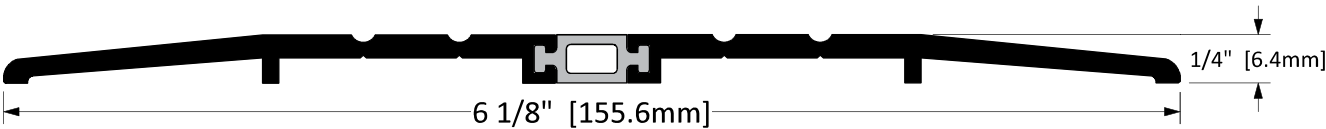

STD

Finish Options


Mill Finish


Standard

Optional

Screw Options

 Screw Type: **G**
3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey
Phillips Drive, Concrete Screws
(5/32" Pre-Drill Required)

 Screw Type: **H**
#10 X 1-3/4" Stainless Steel Flat Head,
Robertson Drive, Type A Screws
(Complete With Nylon Anchor)

 Screw Type: **I**
#10 X 2" Stainless Steel Flat
Head, Tamper-Resistant Torx
Drive, Type A Screws
(Complete With Nylon Anchor)

Operation	Thermal Break Threshold
Features	Mill Finish Extruded Aluminum Insert included
Application	Ideal for Residential, Commercial & Industrial

Customer Name:

Job No./Name:

Date:

Provided By:

Notes: