


CT-805SS



STD

FINISHES


11 GA. 304 Stainless Steel 2B

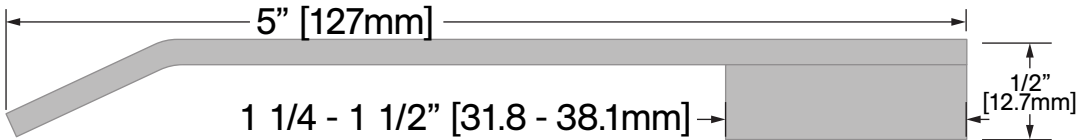

Operation: Threshold
Features: Stainless Steel
Application: Ideal for Residential, Commercial & Industrial
Maximum Length: 96 in [2438 mm]


SCREW OPTIONS

Standard



Screw Type: H
#10 X 1-3/4" Stainless Steel Flat Head,
Robertson Drive, Type A Screws
(complete with nylon anchor)

Optional



Screw Type: I
#10 X 2" Stainless Steel Flat
Head, Tamper-Resistant Torx
Drive, Type A Screws
(complete with nylon anchor)

Customer Name	Job No./Name	Date	Provided By:
<hr/>	<hr/>	<hr/>	<hr/>
Notes			