

CT-807



KNC

STD
OPT

Finish Options


- Mill Finish
- Bronze Anodized
- Black Anodized
- Clear Anodized

Screw Options


Standard




Screw Type: **G**
3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey
Phillips Drive, Concrete Screws
(5/32" Pre-Drill Required)



Screw Type: **H**
#10 X 1-3/4" Stainless Steel Flat Head,
Robertson Drive, Type A Screws
(Complete With Nylon Anchor)



Screw Type: **I**
#10 X 2" Stainless Steel Flat
Head, Tamper-Resistant Torx
Drive, Type A Screws
(Complete With Nylon Anchor)

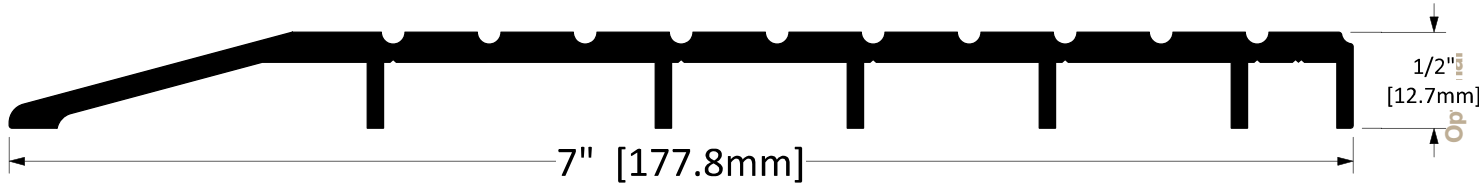

Operation	Threshold
Features	<ul style="list-style-type: none">Mill Finish Extruded Aluminum
Application	<ul style="list-style-type: none">Ideal for Residential, Commercial & Industrial

Customer Name:	Job No./Name:	Date:	Provided By:
<hr/>	<hr/>	<hr/>	<hr/>

Notes: