

CT-808SS



KNC




STD

FINISHES

11 GA. 304 Stainless Steel 2B


SCREW OPTIONS

Standard




Screw Type: H
#10 X 1-3/4" Stainless Steel Flat Head, Robertson Drive, Type A Screws
(complete with nylon anchor)

Optional



Screw Type: I
#10 X 2" Stainless Steel Flat Head, Tamper-Resistant Torx Drive, Type A Screws
(complete with nylon anchor)

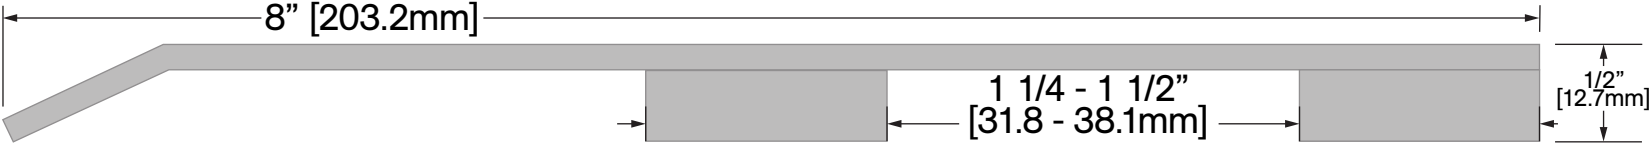

Operation: Threshold
Features: Stainless Steel
Application: Ideal for Residential, Commercial & Industrial
Maximum Length: 96 in [2438 mm]

Customer Name	Job No./Name	Date	Provided By
Notes			

KN Crowder

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3
T. 1-866-999-1562 customerservice@kncrowder.com kncrowder.com
© 2020-2024 K.N. Crowder Mfg. Inc. All Rights Reserved.