


## CT-808

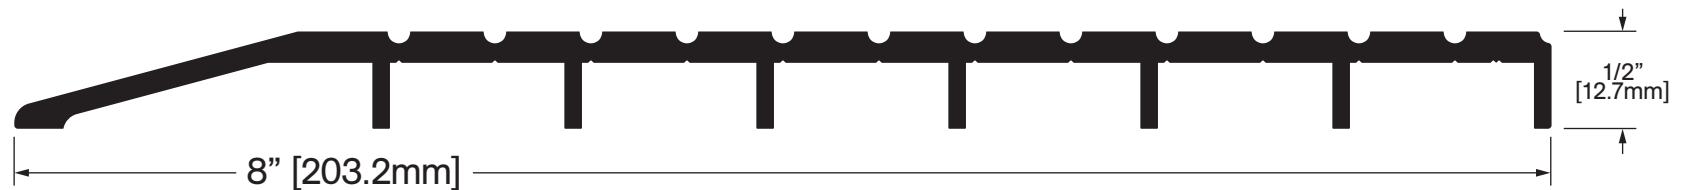

**Operation:** Threshold  
**Features:** Mill Finish Extruded Aluminum  
**Application:** Ideal for Residential, Commercial & Industrial  
**Maximum Length:** 192 in [4877 mm]

**Customer Name**

**Job No./Name**

**Date**

**Provided By**

**Notes**

**KN Crowder**

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3  
 T. 1-866-999-1562 [customerservice@kncrowder.com](mailto:customerservice@kncrowder.com) [kncrowder.com](http://kncrowder.com)  
 © 2020-2025 K.N. Crowder Mfg. Inc. All Rights Reserved.

## FINISHES

**STD** Mill Finish

Bronze Anodized

Black Anodized


Clear Anodized

Special \_\_\_\_\_


## SCREW OPTIONS



**Screw Type: G**  
 3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey  
 Phillips/Robertson Combo Drive, Concrete Screws  
 (5/32" pre-drill required)



**Screw Type: H**  
 #10 X 1-3/4" Stainless Steel Flat Head, Robertson  
 Drive, Type A Screws  
 (complete with nylon anchor)



**Screw Type: I**  
 #10 X 2" Stainless Steel Flat Head,  
 Tamper-Resistant Torx Drive, Type A Screws  
 (complete with nylon anchor)