


# CT-916

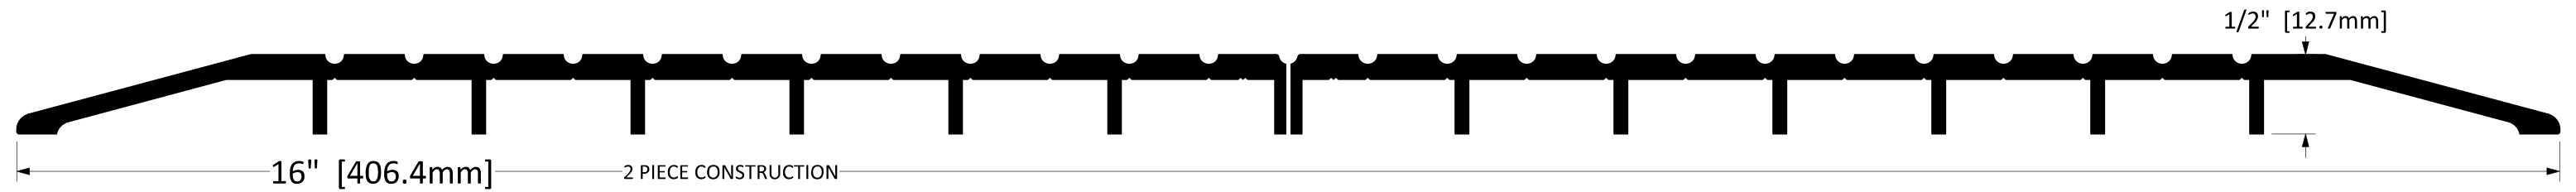

**STD** Finish Options  
Mill Finish

### Screw Options

**Standard**

 Screw Type: **G**  
3/16" X 1-3/4" Hi-Lo Tapping Thread, Grey Phillips Drive, Concrete Screws  
(5/32" Pre-Drill Required)

**Optional**

 Screw Type: **H**  
#10 X 1-3/4" Stainless Steel Flat Head, Robertson Drive, Type A Screws  
(Complete With Nylon Anchor)

 Screw Type: **I**  
#10 X 2" Stainless Steel Flat Head, Tamper-Resistant Torx Drive, Type A Screws  
(Complete With Nylon Anchor)

<b>Operation</b>	Threshold
<b>Features</b>	<ul style="list-style-type: none"> <li>Mill Finish Extruded Aluminum</li> </ul>
<b>Application</b>	<ul style="list-style-type: none"> <li>Ideal for Residential, Commercial &amp; Industrial</li> </ul>

Customer Name: \_\_\_\_\_ Job No./Name: \_\_\_\_\_ Date: \_\_\_\_\_ Provided By: \_\_\_\_\_

Notes: