

AUTOMATIC DOOR BOTTOMS FOR HOLLOW METAL DOORS

MAXIMUM DROP: 7/16 in [11.1 mm]


CT-54



EXTRUDED ALUMINUM & SILICONE

Screw Type: A
OPT Screw Type: B
STD Finish: Mill

Designed to fit the recess of a standard hollow metal door.
Available from stock sizes of 24 in [609.6 mm], 30 in [762 mm], 36 in [914.4 mm], 42 in [1066.8 mm], and 48 in [1219.2 mm].
Stock sizes can be shortened up to 6 in [152.4 mm] on site, except 24 in [609.6 mm] which can be shortened to 21 in [533.4 mm].
Longer or shorter sizes fabricated to order.
Maximum width is 60 in [1524 mm].

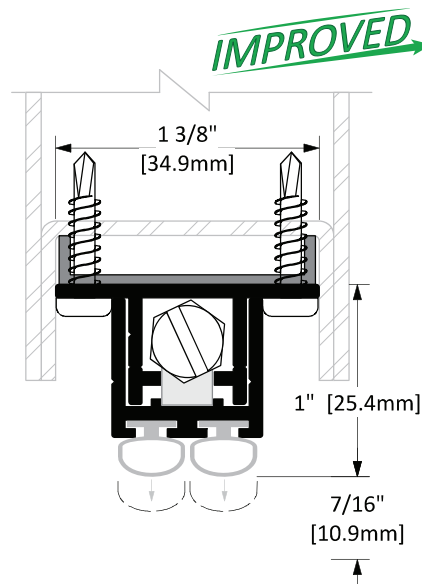

ADJUSTABLE DOOR SHOES

CT-730

EXTRUDED ALUMINUM & VINYL

Screw Type: N
OPT Screw Type: O
STD Finish: Mill

For 1 3/4 in [44.5 mm] thick doors.
For hollow metal and wood doors.

