



FEATURES

- Adjustable-blade Steel Door Louver**
- Designed for 1 3/8 in [34.9 mm] to 1 3/4 in [44.5 mm] plastic laminated, wood or hollow metal doors
 - Z-blades riveted to operating bar and frame at 1 in [25.4 mm] intervals in welded 1 1/2 in [38.1 mm] deep frame
 - Mechanical stop holds blades open
 - Blades are operated by a manual adjusting lever
 - Self-attaching, mitered frame with welded corners: screws fasten through frame into louver core, leaving corridor side of frame free of fasteners
 - 18-gauge cold rolled steel frame and 16-gauge blades
 - 45% free are

CUSTOM SIZE

List door cut-out size

_____ wide x _____ high

(min. 8 in [203.2 mm] x 6 in [152.4 mm],
max. 24 in [609.6 mm] x 36 in [914.4 mm])

OPTIONS

- Finish**
- ☒ Standard mineral bronze powder coat
 - ☐ Non-standard
 - ☐ AMS Beige
 - ☐ SC Beige
 - ☐ Sand
 - ☐ Custom
 - ☐ Brass
 - ☐ Black
 - ☐ Flat Black
 - ☐ Gray
 - ☐ Silver
 - ☐ White

- Add-on for Corrosion Resistance and Exterior Use**
(available with above finish)
- ☐ Zinc-plated


- Fastener**
- ☒  #8 x 3/4" Phillips Head Screws, matches finish
 - ☐  Security torx screws

- Screen**
- ☒ No screen
 - ☐ Nylon insect screen - black fibreglass screen with 18 x 16 mesh
 - ☐ Aluminum bird screen - silver aluminum screen with 18 x 16 mesh

Customer Name	Job No./Name	Date	Provided By
_____	_____	_____	_____

Notes

PRODUCT DIMENSIONS

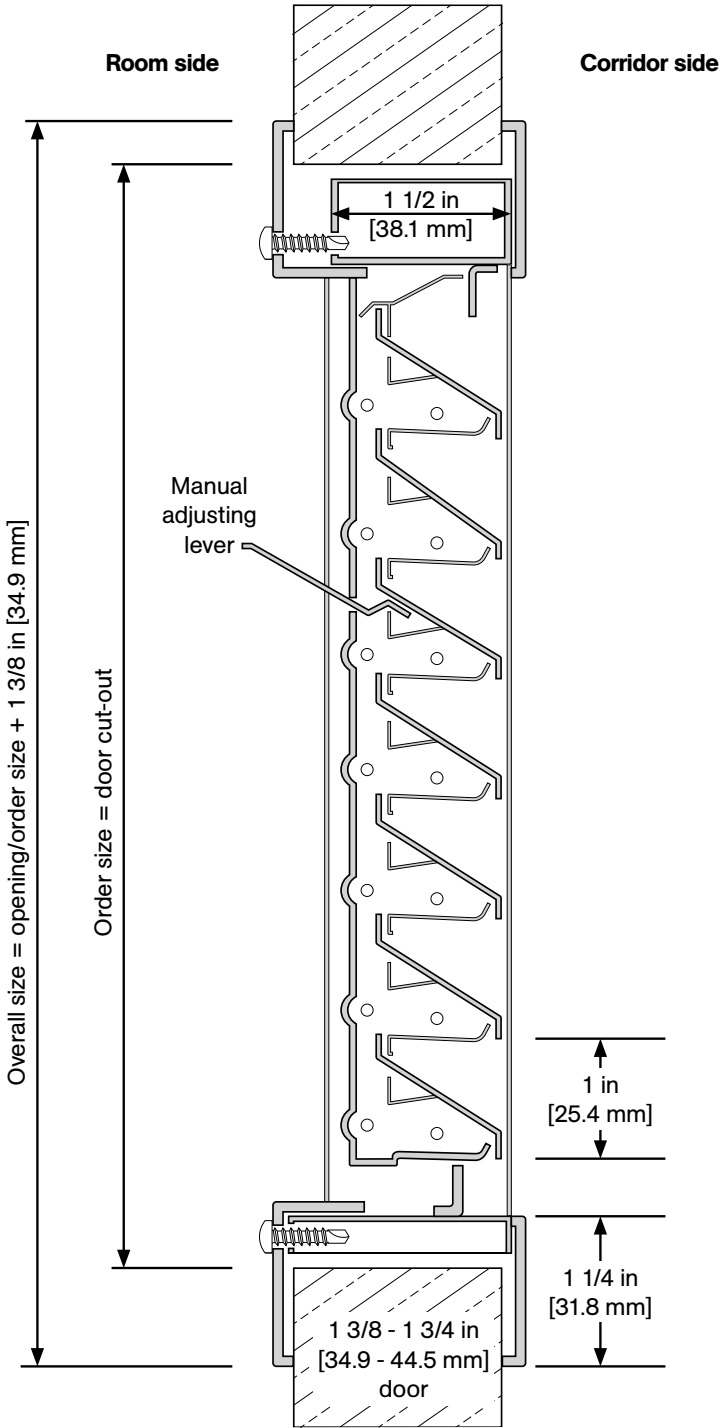

Customer Name	Job No./Name	Date	Provided By
_____	_____	_____	_____

Notes