

SDL-AB

Adjustable Blade Louver

KNC



Manually-operated adjustable louver for doors, transoms and partitions

Specifications

Material

18-gauge CRS frame and 16-gauge blades.
Minimum size is 8 in [203.2 mm] x 6 in [152.4 mm]
Maximum size is 24 in [609.6 mm] x 36 in [914.4 mm]

Construction

Louver: Z-blades riveted to the operating bar and frame at 1 in [25.4 mm] intervals in 1 1/2 in [38.1 mm] deep welded frame.
Mechanical stop holds blades open.
Frame: Self-attaching, mitered and welded corners: screws fastened through prepared frame into louver core leaving corridor side of frame free of fasteners.

Operation

Manually-adjustable on interior face unless otherwise specified.

Door

For 1 3/8 in [34.9 mm] to 1 3/4 in [44.5 mm] thick.

Fasteners


#8 x 3/4" Phillips head screws

Finish

Standard mineral bronze powder coat

Free Flow Area

45% free area

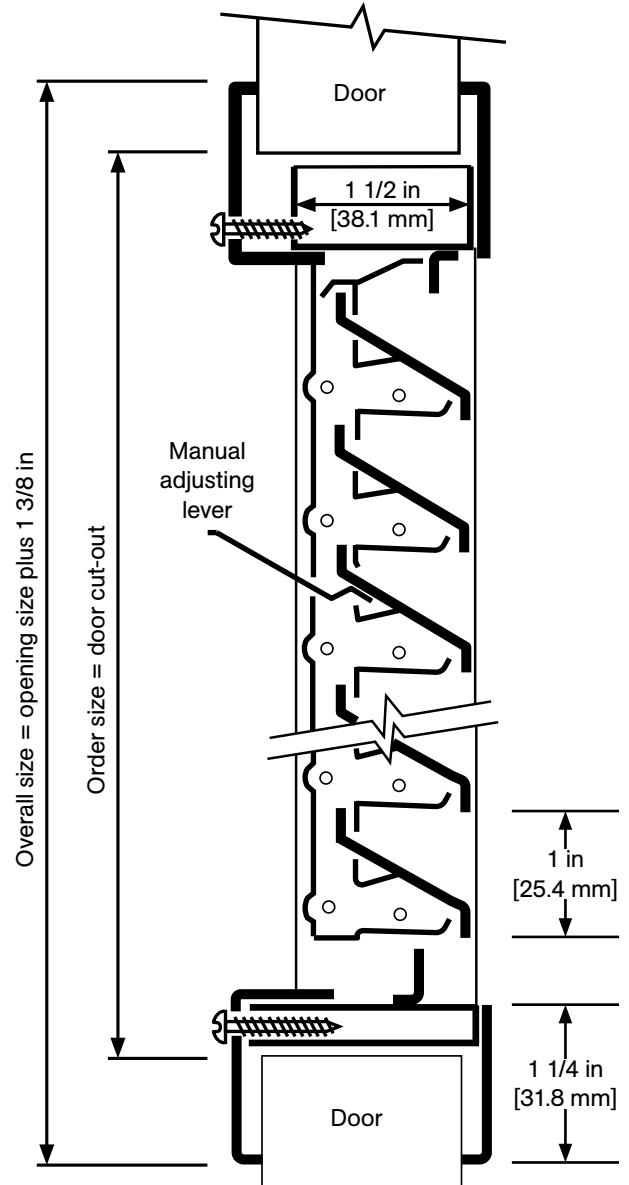

Options

Finishes

Zinc-Plated for corrosion resistance & exterior use.
Special order colours. Please provide colour chip.

Fasteners

Security fasteners, please specify

Screen

18-14 mesh insect screen installed in roll formed aluminum frame.
Aluminum, bronze or fiberglass mesh available.

Size

_____ wide x _____ high _____ quantity
(door cut out size equals order size)