

FEATURES

Security Steel Door Louver

- Designed for 1 3/4 in [44.5 mm] plastic laminated, wood or hollow metal doors
- Recommended for vandal-proof building design
- 2 rows of sight-proof inverted, split Y-blades at 1 in [25.4 mm] intervals in welded frame with interlocking construction
- Security grille welded to interior and exterior of louver with 13/16 in [20.6 mm] square openings, two-piece thru-bolted door
- 18-gauge cold rolled steel frame and blades; 12-gauge cold rolled steel security grille
- Multiple sections can be combined for larger sizes
- 40% free area

STOCK SIZES & FINISHES

Door cut-out size

Width Inches	x	Height Inches
Mineral Bronze Powder Coat		
18	x	12
18	x	18
24	x	12
24	x	24

CUSTOM SIZE

List door cut-out size

_____ wide x _____ high

(min. 6 in [152.4 mm] x 6 in [152.4 mm],
max. 36 in [914.4 mm] x 80 in [2032 mm])

OPTIONS

Finish

Standard mineral bronze powder coat

Non-standard


AMS Beige	Brass	Gray
SC Beige	Black	Silver
Sand	Flat Black	White
Custom		

Add-on for Corrosion Resistance and Exterior Use


(available with above finish)

Zinc-plated

Fastener



#8-32 Phillips Head Thru-Bolts with blank head one side, matches finish



Security torx screws

Screen

No screen

Nylon insect screen - black fibreglass screen with 18 x 16 mesh

Aluminum bird screen - silver aluminum screen with 18 x 16 mesh

Customer Name


Job No./Name

Date

Provided By

Notes

PRODUCT DIMENSIONS

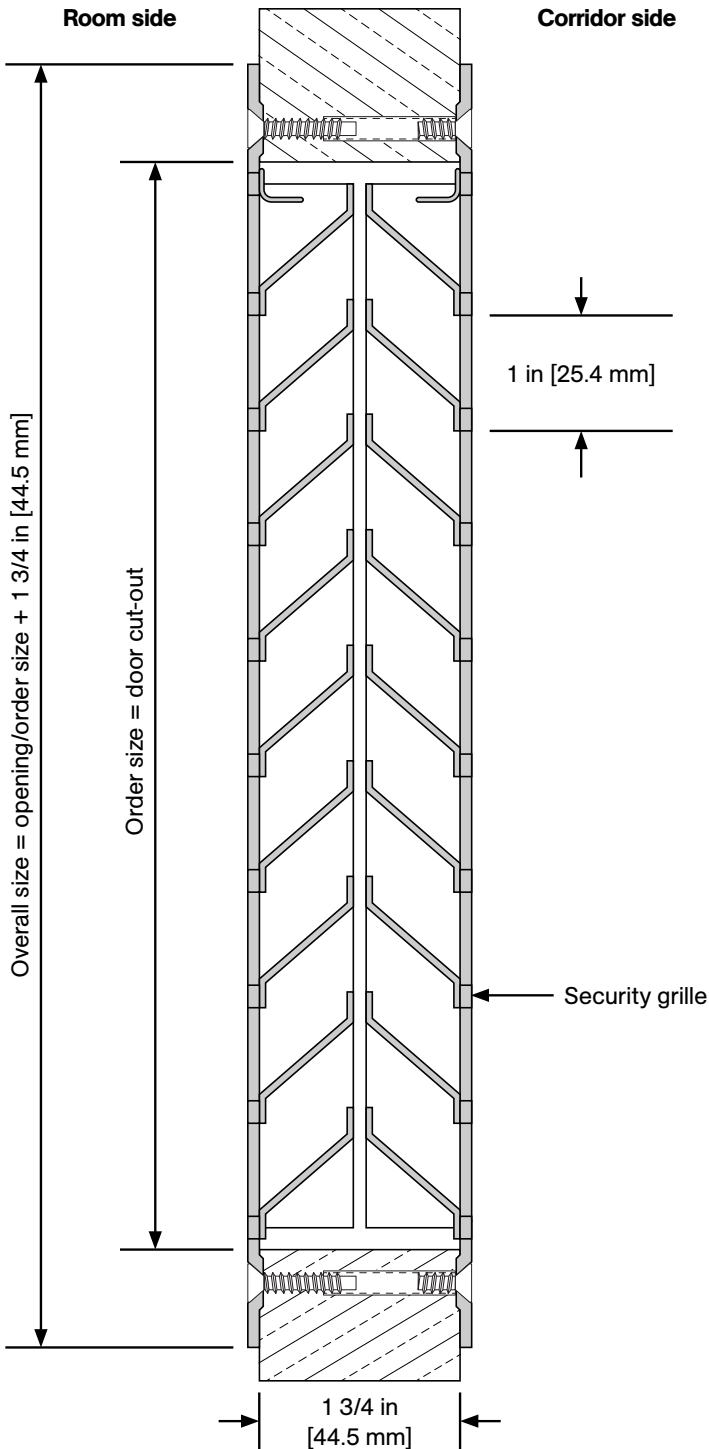

Customer Name

Job No./Name

Date

Provided By

Notes