



FEATURES

- Flush-mounted Transom Steel Door Louver**
- Designed for 1 3/4 in [44.5 mm] hollow metal frame doors
 - Two rows of sight-proof inverted split Y-blades at 1 in [25.4 mm] intervals
 - Interlocking blade construction within 1 13/16 in [46 mm] deep U-channel frame
 - 18-gauge cold rolled steel frame and blades
 - Multiple sections can be combined for larger sizes
 - 50% free area

CUSTOM SIZE

List door cut-out size

_____ wide x _____ high

(min. 10 in [254 mm] × 10 in [254 mm], max. 36 in [914 mm] × 36 in [914 mm] per section. Multi-section configurations available with a max. overall louver width or height of 72 in [1829 mm]. Max. 72 in [1829 mm] applies to one dimension only; opposite dimension must not exceed 36 in [914 mm].)

OPTIONS

Finish			
Standard gray powder coat			
Stainless steel #4			
Non-standard			
AMS Beige	Brass	Mineral Bronze	
SC Beige	Black	Silver	
Sand	Flat Black	White	
Custom			

Add-on for Corrosion Resistance and Exterior Use
(available with above finish)

Galvanneal sheet

Zinc-plated

Screen

No screen


Nylon insect screen - black fibreglass screen with 18 x 16 mesh

Aluminum bird screen - silver aluminum screen with 18 x 16 mesh

Customer Name	Job No./Name	Date	Provided By
_____	_____	_____	_____

Notes

PRODUCT DIMENSIONS

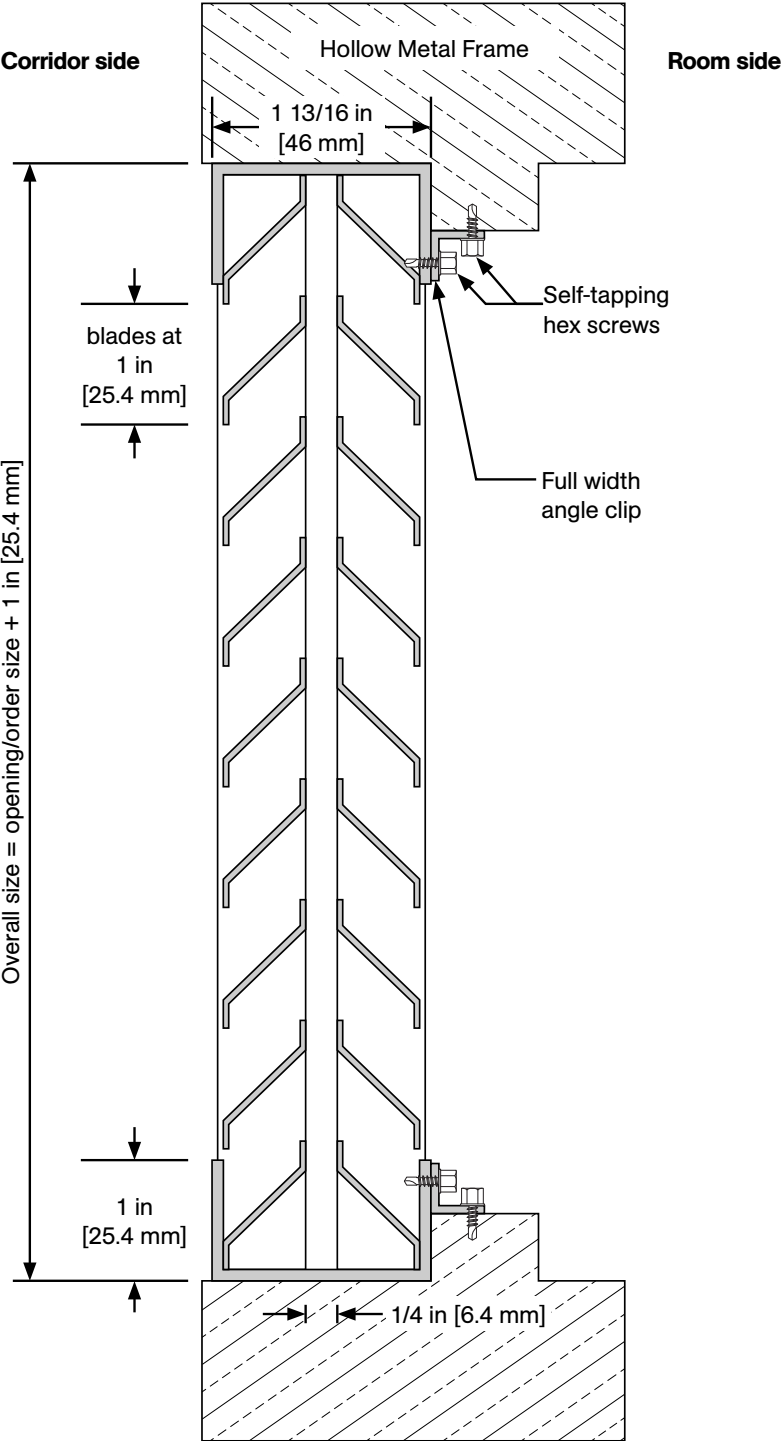

Customer Name	Job No./Name	Date	Provided By
_____	_____	_____	_____

Notes