



FEATURES

Flush-Mounted Louver for Transoms

- Designed for 1 3/4 in [44.5 mm] hollow metal frame doors
- Two rows of sight-proof inverted split Y-blades at 1 in [25.4 mm] intervals
- Interlocking blade construction within 1 13/16 in [46 mm] deep U-channel frame
- 18-gauge cold rolled steel frame and blades
- Multiple sections can be combined for larger sizes
- 50% free area

CUSTOM SIZE

List door cut-out size

_____ wide x _____ high

(min. 10 in [254 mm] × 10 in [254 mm], max. 36 in [914 mm] × 36 in [914 mm] per section. Multi-section configurations available with a max. overall louver width or height of 72 in [1829 mm]. Max. 72 in [1829 mm] applies to one dimension only; opposite dimension must not exceed 36 in [914 mm].)

OPTIONS

Finish

- ☒ Standard gray powder coat
- ☐ Stainless steel #4
- ☐ Non-standard
 - ☐ AMS Beige
 - ☐ SC Beige
 - ☐ Sand
 - ☐ Custom
 - ☐ Brass
 - ☐ Black
 - ☐ Flat Black
 - ☐ Mineral Bronze
 - ☐ Silver
 - ☐ White

Add-on for Corrosion Resistance and Exterior Use (available with above finish)

- ☐ Galvanneal sheet
- ☐ Zinc-plated

Screen

- ☒ No screen
- ☐ Nylon insect screen - black fiberglass screen with 18 x 16 mesh
- ☐ Aluminum bird screen - silver aluminum screen with 18 x 16 mesh

Customer Name


Job No./Name

Date

Provided By

Notes

PRODUCT DIMENSIONS

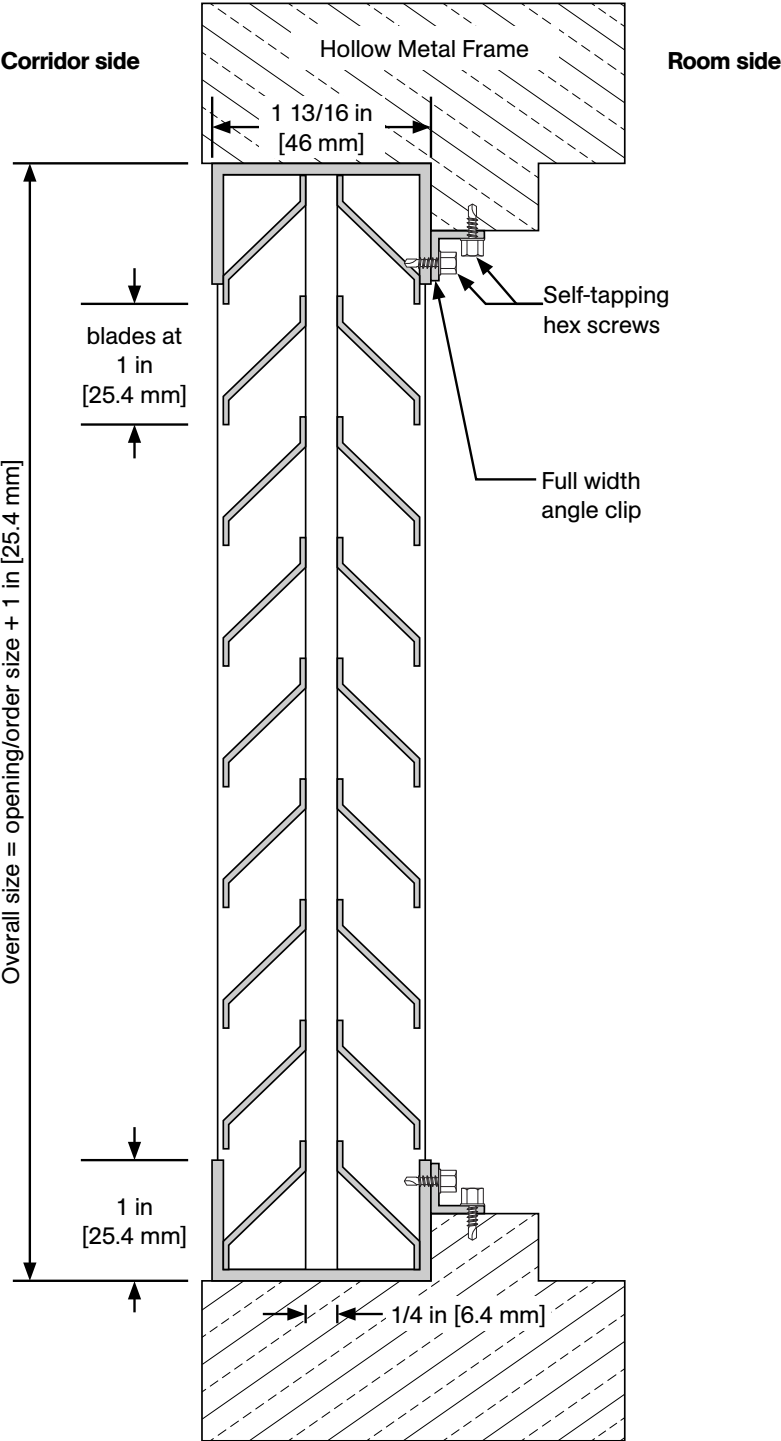

Customer Name	Job No./Name	Date	Provided By
_____	_____	_____	_____

Notes