


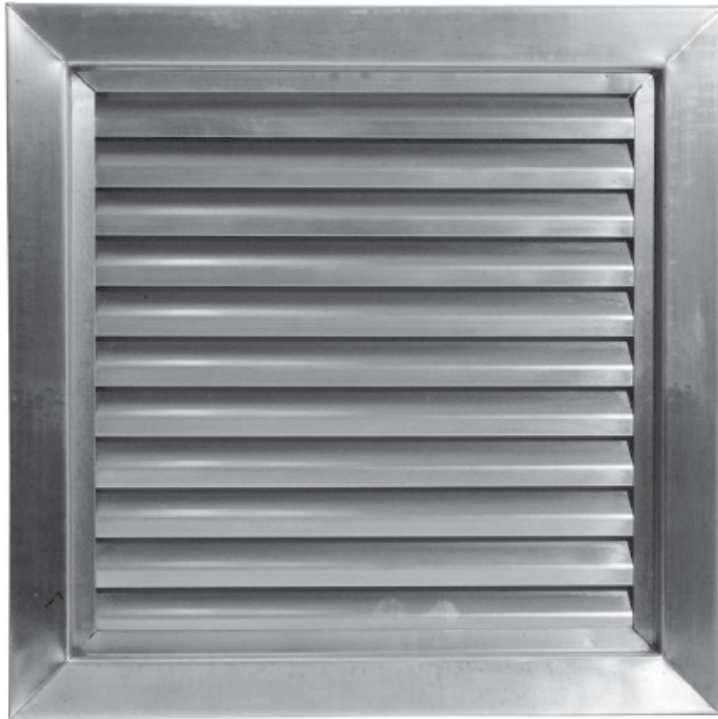

FEATURES

Steel Door Louver

- Designed for 1 3/4 in [44.5 mm] plastic laminated, wood or hollow metal doors, in schools, Class A, and institutional buildings.
- Designed for plastic laminated, wood and hollow metal doors
- Constructed with an 18-gauge cold-rolled steel frame and 20-gauge blades for durability.
- Sight-proof inverted Y-blades at 1 in [25.4 mm] intervals, interlocked with a 1 in [25.4 mm] deep welded frame.
- Self-attaching frame with 1 1/4 in [31.7 mm] trim, mitered and welded corners. Screws fasten through the frame into the louver core, leaving the corridor side free of fasteners.
- Expandable design: multiple sections can combine to accommodate larger openings.
- Multiple sections can be combined for larger sizes
- 50% free area

STOCK SIZES & FINISHES

Door cut-out size

Width Inches	x	Height Inches	Width Inches	x	Height Inches
Mineral Bronze Powder Coat			18	x	18
12	x	8	20	x	12
12	x	12	24	x	12
12	x	18	24	x	18
18	x	12	24	x	24

CUSTOM SIZE

List door cut-out size

_____ wide x _____ high

(min. 6 in [152.4 mm] x 4 in [101.6 mm],
max. 48 in [1219.2 mm] x 80 in [2032 mm])

OPTIONS

Finish

- ☒ Standard mineral bronze powder coat
- ☐ Stainless steel #4
- ☐ Non-standard
 - ☐ AMS Beige
 - ☐ SC Beige
 - ☐ Sand
 - ☐ Custom
 - ☐ Brass
 - ☐ Black
 - ☐ Flat Black
 - ☐ Gray
 - ☐ Silver
 - ☐ White

Add-on for Corrosion Resistance and Exterior Use

(available with above finish)

- ☐ Galvanneal sheet
- ☐ Zinc-plated

Fastener

- ☒ #8 x 3/4" Phillips Head Screws, matches finish
- ☐ Security torx screws

Screen

- ☒ No screen
- ☐ Nylon insect screen - black fibreglass screen with 18 x 16 mesh
- ☐ Aluminum bird screen - silver aluminum screen with 18 x 16 mesh

Customer Name


Job No./Name

Date

Provided By

Notes

PRODUCT DIMENSIONS

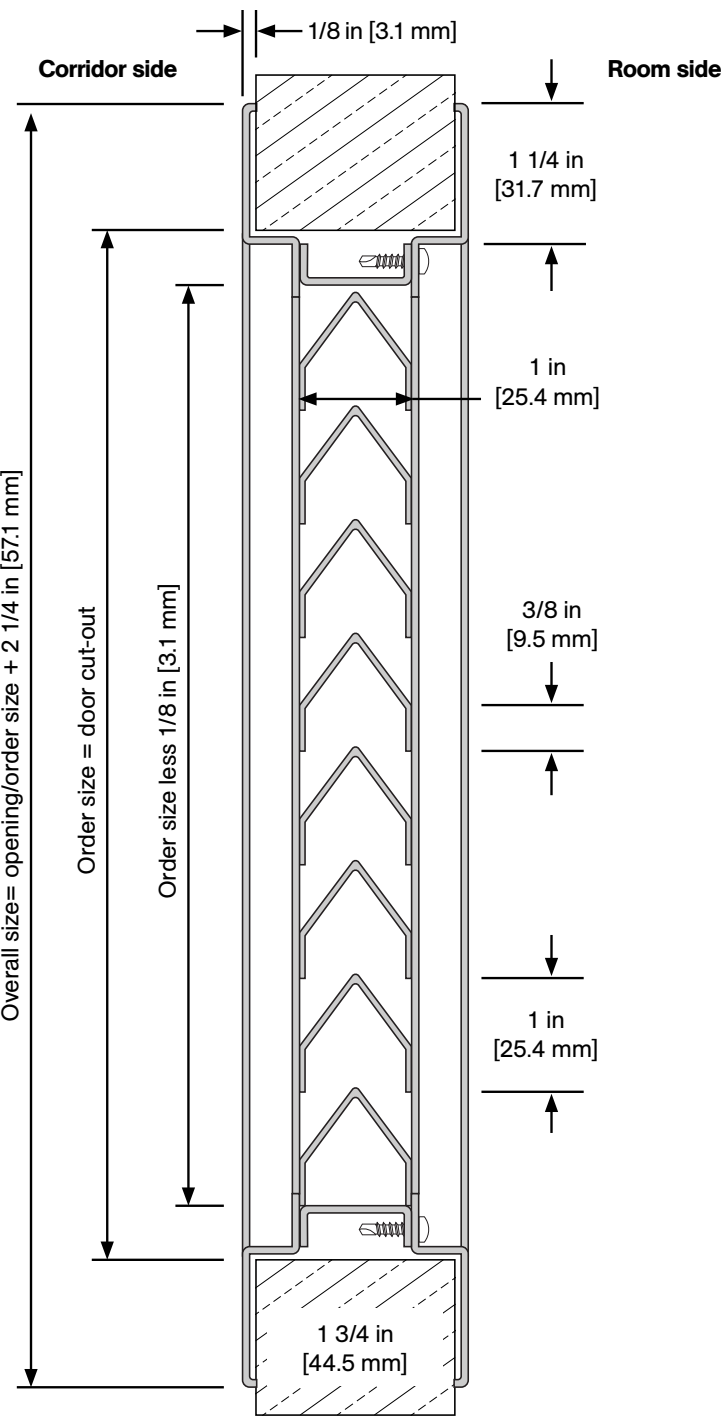

Customer Name	Job No./Name	Date	Provided By
_____	_____	_____	_____

Notes