TYPE C-W-2X6

KNC

FEATURES

- 150 lbs. [68 kg] weight capacity
- For doors wider than 18 in [457 mm])
- Quick Release Hanger System for quick and easy installation
- Nylon wheels and precision ball bearings provide smooth and quiet door operation
- Adjustable in-track stops
- Crowder Frame pocket door kit including header track, header brackets, steel uprights and foot brackets to build a pocket on site
- Cycle tested for up to 150,000 cycles without fail
- ADA Compliant (Barrier-free) design

COMPLETE 1 DOOR KIT BREAKDOWN

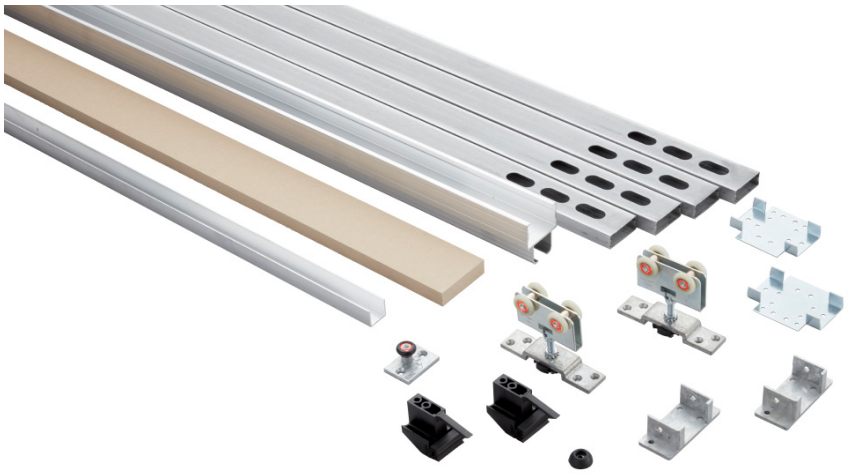

Each kit includes one CP-826 Header Track x length based on kit size, two CP-HB2X6 Header Brackets, two CP-930 Drywall Support x length based on kit size, four (or six) Steel Uprights x length based on kit size, two (or three) CP-2X6 Foot Brackets, two C-411 Quick Release Hangers, two CDC-411 Catch/Stops, one C-914 Guide Channel x length based on kit size, one CP-913 Pocket Guide and necessary fasteners

OPTIONAL

Door Locks & Pulls

Add-On Products

◯ **CPD-2X6-Joiner Kit**

Use for applications where double bi-parting door openings are required. Two single Crowder Frame kits are required in order to use the joiner kit.

Door Width

- ◯ 18 in [457 mm] to 36 in [914 mm] wide
- ◯ Greater than 36 in [914 mm] to 48 in [1219 mm] wide

Door Height

- ◯ 80 in [2032 mm] to 84 in [2134 mm] or 2150 mm high
- ◯ 92 in [2337 mm] to 96 in [2438 mm] or 2455 mm high
- ◯ 116 in [2947 mm] to 120 in [3048 mm]

Customer Name _____ **Job No./Name** _____ **Date** _____ **Provided By** _____

Notes

KN Crowder

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3
T. 1–866–999–1562 customerservice@kncrowder.com kncrowder.com
© 2020-2025 K.N. Crowder Mfg. Inc. All Rights Reserved.

TYPE C-W-2X6

KNC

COMPLETE ELEVATION VIEW

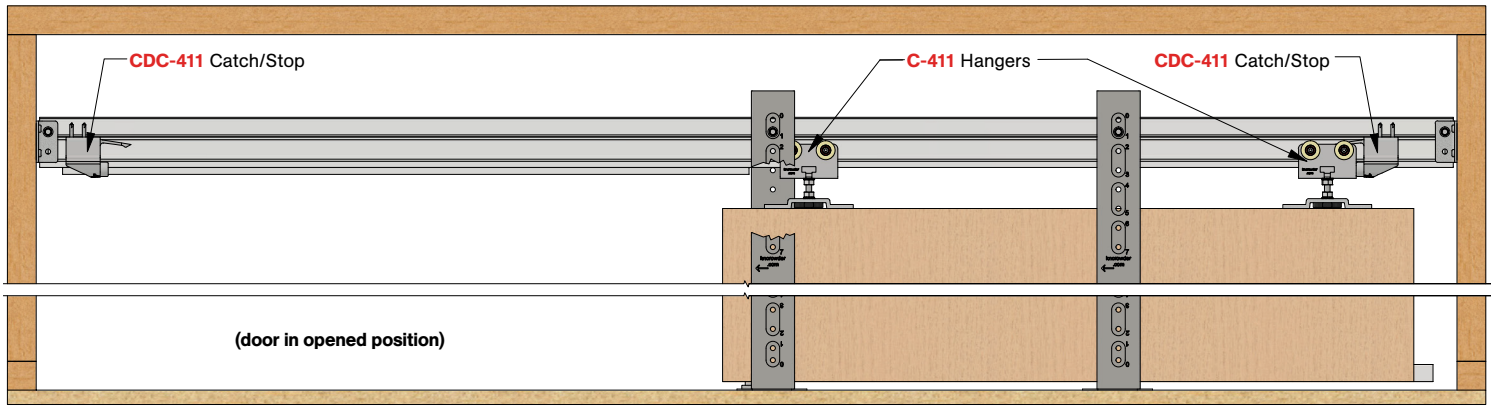

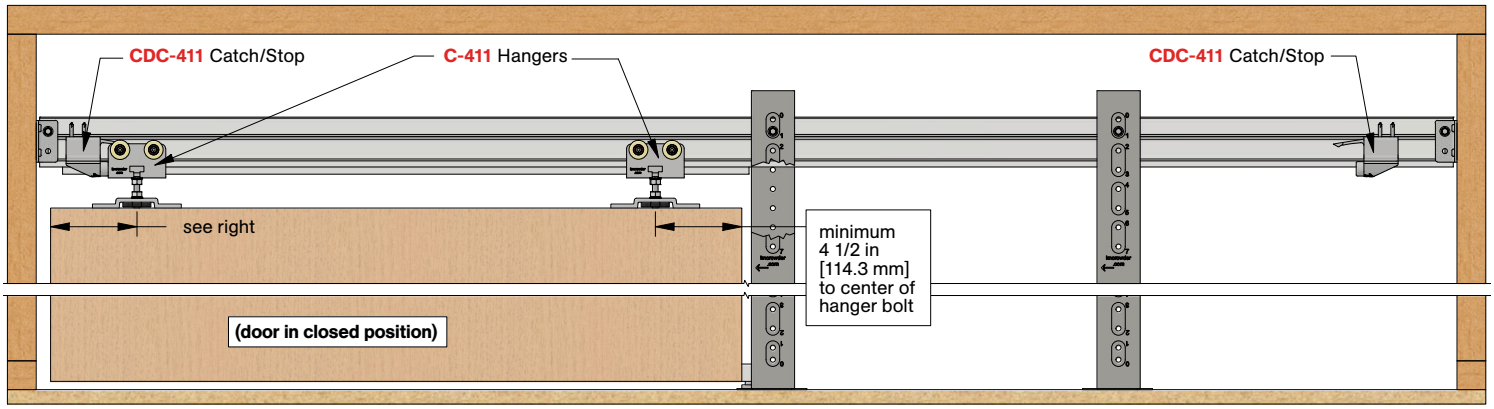

Customer Name _____ **Job No./Name** _____ **Date** _____ **Provided By** _____

Notes

KN Crowder

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3
T. 1–866–999–1562 customerservice@kncrowder.com kncrowder.com
© 2020-2025 K.N. Crowder Mfg. Inc. All Rights Reserved.

TYPE C-W-2X6

KNC

PRODUCT DIMENSIONS

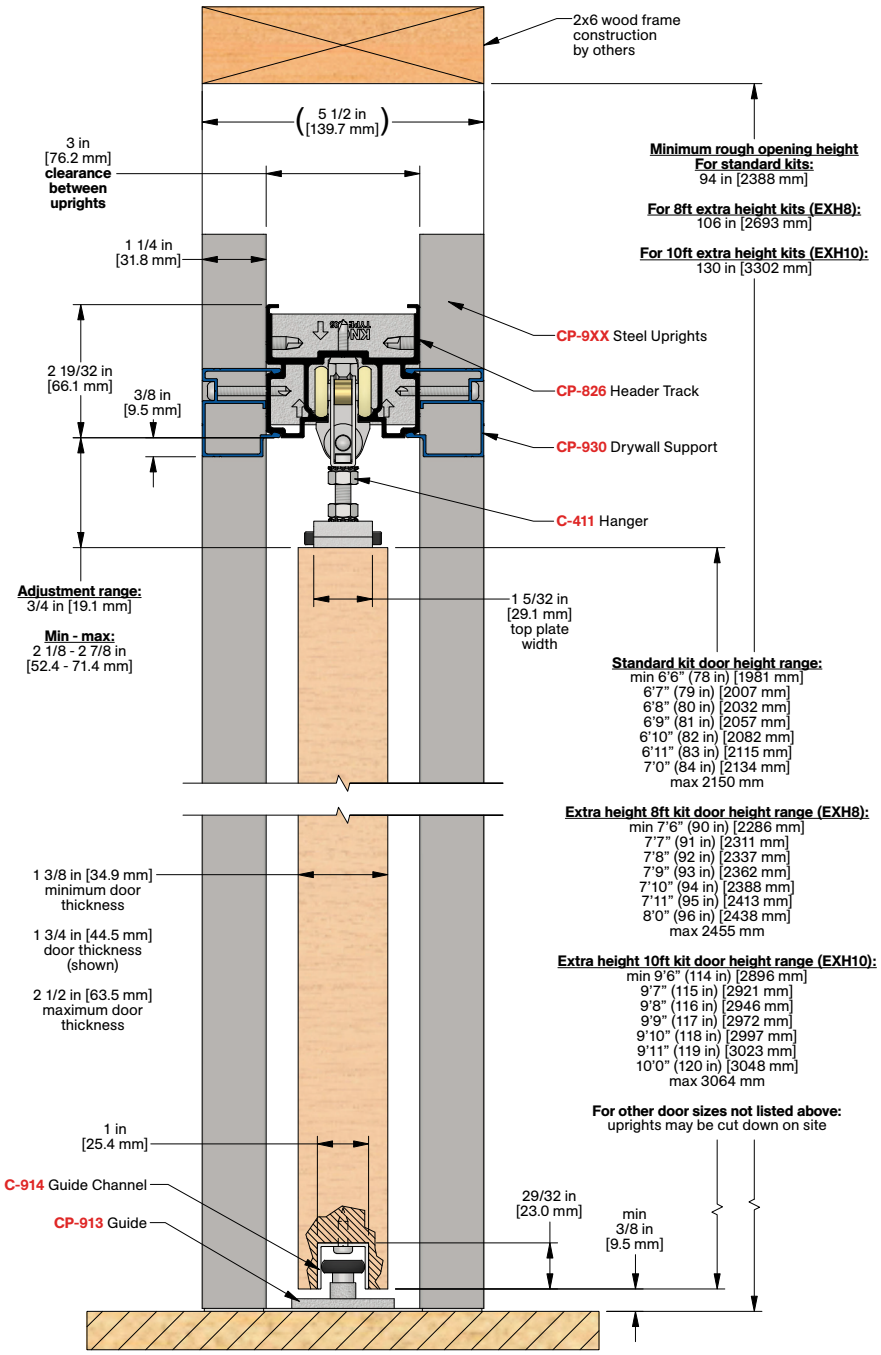

Minimum rough opening height
For standard kits:
94 in [2388 mm]

For 8ft extra height kits (EXH8):
106 in [2693 mm]

For 10ft extra height kits (EXH10):
130 in [3302 mm]

Standard kit door height range:
min 6'6" (78 in) [1981 mm]
6'7" (79 in) [2007 mm]
6'8" (80 in) [2032 mm]
6'9" (81 in) [2057 mm]
6'10" (82 in) [2082 mm]
6'11" (83 in) [2115 mm]
7'0" (84 in) [2134 mm]
max 2150 mm

Extra height 8ft kit door height range (EXH8):
min 7'6" (90 in) [2286 mm]
7'7" (91 in) [2311 mm]
7'8" (92 in) [2337 mm]
7'9" (93 in) [2362 mm]
7'10" (94 in) [2388 mm]
7'11" (95 in) [2413 mm]
8'0" (96 in) [2438 mm]
max 2455 mm

Extra height 10ft kit door height range (EXH10):
min 9'6" (114 in) [2896 mm]
9'7" (115 in) [2921 mm]
9'8" (116 in) [2946 mm]
9'9" (117 in) [2972 mm]
9'10" (118 in) [2997 mm]
9'11" (119 in) [3023 mm]
10'0" (120 in) [3048 mm]
max 3064 mm

For other door sizes not listed above:
uprights may be cut down on site

Installation Instructions

Customer Name _____ **Job No./Name** _____ **Date** _____ **Provided By** _____

Notes

KN Crowder
1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3
T. 1–866–999–1562 customerservice@kncrowder.com kncrowder.com
© 2020-2025 K.N. Crowder Mfg. Inc. All Rights Reserved.