## TYPE C-W-2X6





### **FEATURES**

- 150 lbs. [68 kg] weight capacity
- For doors wider than 18 in [457 mm])
- Quick Release Hanger System for quick and easy installation
- Nylon wheels and precision ball bearings provide smooth and quiet door operation
- Crowder Frame pocket door kit including header track, header brackets, steel uprights and foot brackets to build a pocket on site
- Cycle tested for up to 150,000 cycles without fail
- ADA Compliant (Barrier-free) design

## COMPLETE 1 DOOR KIT BREAKDOWN



Each kit includes one CP-826 Header Track x length based on kit size, two CP-HB2X6 Header Brackets, two CP-930 Drywall Support x length based on kit size, four (or six) Steel Uprights x length based on kit size, two (or three) CP-2X6 Foot Brackets, two C-411 Quick Release Hangers, two CDC-411 Catch/Stops, one C-914 Guide Channel x length based on kit size, one CP-913 Pocket Guide and necessary fasteners

### **OPTIONAL**

#### **Door Locks & Pulls**





#### **Add-On Products**



#### CPD-2X6-Joiner Kit

Use for applications where double bi-parting door openings are required. Two single Crowder Frame kits are required in order to use the joiner kit.

#### **Door Width**

18 in [457 mm] to 36 in [914 mm] wide Greater than 36 in [914 mm] to 48 in [1219 mm] wide

#### **Door Height**


80 in [2032 mm] to 84 in [2134 mm] or 2150 mm high

92 in [2337 mm] to 96 in [2438 mm] or 2455 mm high

116 in [2947 mm] to 120 in [3048 mm]

Customer Name	Job No./Name	Date	Provided By


**Notes** 




## TYPE C-W-2X6




## **COMPLETE ELEVATION VIEW**

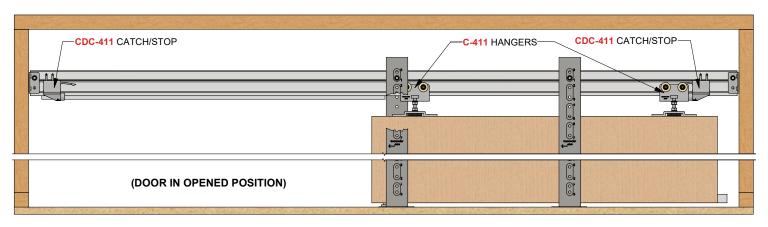

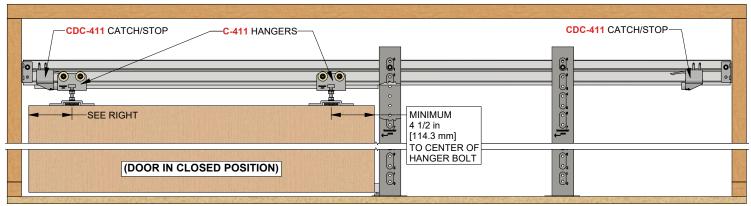

Customer Name	Job No./Name	Date	Provided By


**Notes** 



# TYPE C-W-2X6



## PRODUCT DIMENSIONS

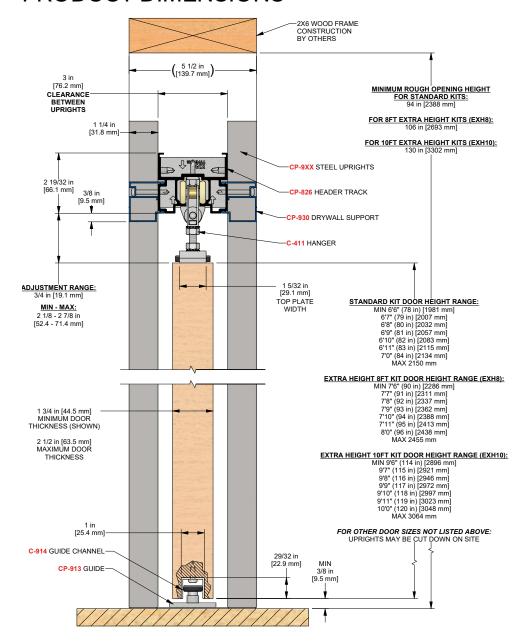

Installation Instructions



Customer Name	Job No./Name	Date	Provided By

**Notes** 

