TYPE C-W-6MS





FEATURES

- 150 lbs. [68 kg] weight capacity
- For doors wider than 18 in [457 mm])
- Quick Release Hanger System for quick and easy installation
- Nylon wheels and precision ball bearings provide smooth and quiet door operation
- Crowder Frame pocket door kit including header track, header brackets, steel uprights and foot brackets to build a pocket on site
- Cycle tested for up to 150,000 cycles without fail
- ADA Compliant (Barrier-free) design

COMPLETE 1 DOOR KIT BREAKDOWN



Each kit includes one CP-806 Header Track x length based on kit size, two CP-HB6MS Header Brackets, two CP-930 Drywall Support x length based on kit size, four (or six) Steel Uprights x length based on kit size, two (or three) CP-6MS Foot Brackets, two C-411 Quick Release Hangers, two CDC-411 Catch/Stops, one C-914 Guide Channel x length based on kit size, one CP-913 Pocket Guide and necessary fasteners

OPTIONAL

Door Locks & Pulls





Add-On Products



CPD-6MS-Joiner Kit

Use for applications where double bi-parting door openings are required. Two single Crowder Frame kits are required in order to use the joiner kit.

Door Width

18 in [457 mm] to 36 in [914 mm] wide Greater than 36 in [914 mm] to 48 in [1219 mm] wide

Door Height


80 in [2032 mm] to 84 in [2134 mm] or 2150 mm high

92 in [2337 mm] to 96 in [2438 mm] or 2455 mm high

116 in [2947 mm] to 120 in [3048 mm]

Customer Name	Job No./Name	Date	Provided By


Notes




TYPE C-W-6MS




COMPLETE ELEVATION VIEW

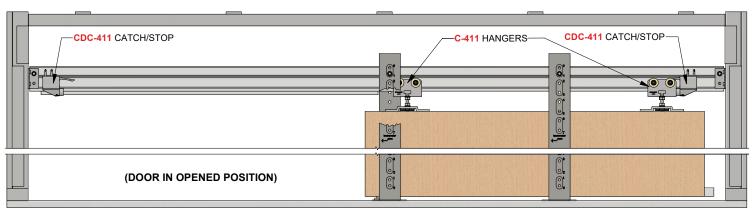

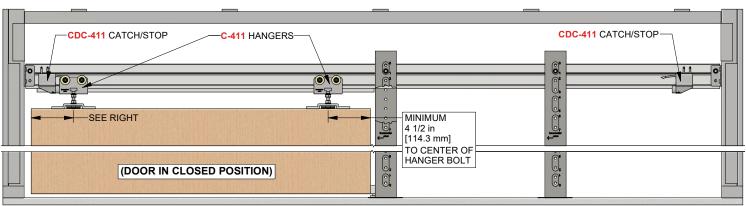

Customer Name	Job No./Name	Date	Provided By


Notes



TYPE C-W-6MS



PRODUCT DIMENSIONS

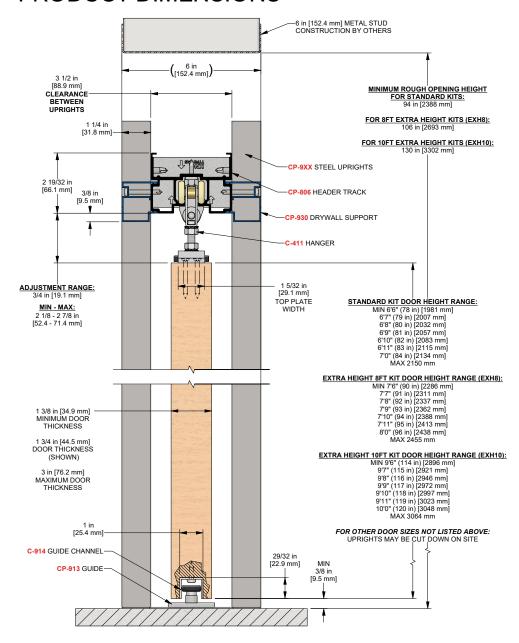

Installation Instructions



Customer Name	Job No./Name	Date	Provided By

Notes

