TYPE CC-B-6MS

KNC
Catch 'N' Close

FEATURES

- 150 lbs. [68 kg] weight capacity
- Effortless opening and closing of the door with the Catch 'N' Close Closing System (for doors wider than 30 in [762 mm])
- Easy Connect Hanger System for easy installation
- Nylon wheels and precision ball bearings provide smooth and quiet door operation
- Crowder Frame pocket door kit including header track, header brackets, steel uprights and foot brackets to build a pocket on site
- Cycle tested for up to 150,000 cycles without fail
- ADA Compliant (Barrier-free) design

COMPLETE 1 DOOR KIT BREAKDOWN

Each kit includes one CP-406-RS Header Track c/w Catch 'N' Close Slot x length based on kit size, two CP-HB6MS Header Brackets, two CP-930 Drywall Support x length based on kit size, four (or six) Steel Uprights x length based on kit size, two (or three) CP-6MS Foot Brackets, one CC-493 Easy Connect Catch 'N' Close Hanger, one CP-493 Easy Connect Pocket Hanger, two CC-100 Catch 'N' Close In-Track Stops, two Catch 'N' Close Closing Devices, one CP-008 Catch 'N' Close Crowder Frame Clip, one C-201 Guide Channel x length based on kit size, one CP-200 Pocket Guide and necessary fasteners.

CC-75 for doors up to 75 lbs. [34 kg]
CC-1 for doors up to 150 lbs. [68 kg]

Door Width

30 in [762 mm] to 36 in [914 mm] wide

Greater than 36 in [914 mm] to 48 in [1219 mm] wide

Door Height

80 in [2032 mm] to 84 in [2134 mm] or 2150 mm high

92 in [2337 mm] to 96 in [2438 mm] or 2455 mm high

116 in [2947 mm] to 120 in [3048 mm]

OPTIONAL

Door Locks & Pulls


Add-On Products

CPD-6MS-Joiner Kit

Use for applications where double bi-parting door openings are required. Two single Crowder Frame kits are required in order to use the joiner kit.

Customer Name	Job No./Name	Date	Provided By

Notes

KN Crowder

TYPE CC-B-6MS

COMPLETE ELEVATION VIEW

CC-100 IN-TRACK STOP
RETRACTED SIDE
CC-493 HANGER (WITH TRIGGER)
ACTIVATED SIDE
CP-493 HANGER (WITHOUT TRIGGER)
CP-008 CLIP
CATCH 'N' CLOSE SLOT
8 in [203.2 mm]
CC-100 IN-TRACK STOP

(DOOR IN OPENED POSITION)

CC-100 IN-TRACK STOP
ACTIVATED SIDE
CC-493 HANGER (WITH TRIGGER)
CP-493 HANGER (WITHOUT TRIGGER)
RETRACTED SIDE
CP-008 CLIP
SEE RIGHT
CATCH 'N' CLOSE SLOT
REQUIRED 5 3/8 in [136.5 mm] TO CENTER OF TOP PLATE
CC-100 IN-TRACK STOP

(DOOR IN CLOSED POSITION)

Customer Name

Job No./Name

Date

Provided By

Notes

TYPE CC-B-6MS

PRODUCT DIMENSIONS

6 in [152.4 mm] METAL STUD CONSTRUCTION BY OTHERS

6 in [152.4 mm]

3 1/2 in [88.9 mm]
CLEARANCE BETWEEN UPRIGHTS

1 1/4 in [31.8 mm]

MINIMUM ROUGH OPENING HEIGHT FOR STANDARD KITS:
94 in [2388 mm]

FOR 8FT EXTRA HEIGHT KITS (EXH8):
106 in [2693 mm]

FOR 10FT EXTRA HEIGHT KITS (EXH10):
130 in [3302 mm]

CP-9XX STEEL UPRIGHTS

CP-406 HEADER TRACK

CP-930 DRYWALL SUPPORT

CC-493 HANGER

2 19/32 in [66.1 mm]

3/8 in [9.5 mm]

3/4 in [19.1 mm] TOP PLATE WIDTH

ADJUSTMENT RANGE:
3/8 in [9.5 mm]
MIN - MAX:
1 - 1 3/8 in [25.4 - 34.9 mm]

STANDARD KIT DOOR HEIGHT RANGE:
MIN 6'7" (79 in) [2007 mm]
6'8" (80 in) [2032 mm]
6'9" (81 in) [2057 mm]
6'10" (82 in) [2083 mm]
6'11" (83 in) [2115 mm]
7'0" (84 in) [2134 mm]
MAX 2150 mm

EXTRA HEIGHT 8FT KIT DOOR HEIGHT RANGE (EXH8):
MIN 7'7" (91 in) [2311 mm]
7'8" (92 in) [2337 mm]
7'9" (93 in) [2362 mm]
7'10" (94 in) [2388 mm]
7'11" (95 in) [2413 mm]
8'0" (96 in) [2438 mm]
MAX 2455 mm

1 3/8 in [34.9 mm] MINIMUM DOOR THICKNESS

1 3/4 in [44.5 mm] DOOR THICKNESS (SHOWN)

3 in [76.2 mm] MAXIMUM DOOR THICKNESS

EXTRA HEIGHT 10FT KIT DOOR HEIGHT RANGE (EXH10):
MIN 9'7" (115 in) [2921 mm]
9'8" (116 in) [2946 mm]
9'9" (117 in) [2972 mm]
9'10" (118 in) [2997 mm]
9'11" (119 in) [3023 mm]
10'0" (120 in) [3048 mm]
MAX 3064 mm

FOR OTHER DOOR SIZES NOT LISTED ABOVE:
UPRIGHTS MAY BE CUT DOWN ON SITE

5/8 in [15.9 mm]

C-201 GUIDE CHANNEL

CP-200 GUIDE

3/4 in [19.1 mm]

MIN 3/8 in [9.5 mm]
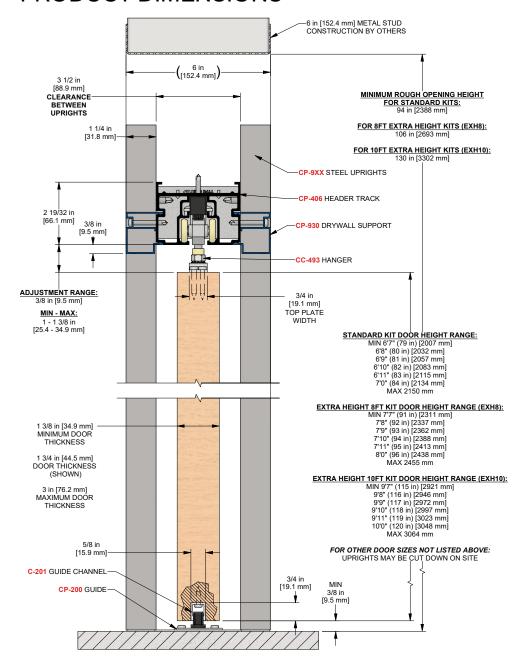
Installation Instructions

Customer Name

Job No./Name

Date

Provided By

Notes