## TYPE CC-NRW-2X6





### **FEATURES**

- 150 lbs. [68 kg] weight capacity
- Effortless opening and closing of the door with the Catch 'N' Close Closing System (for doors wider than 18 in [457 mm] to less than 30 in [762 mm])
- Easy Connect Hanger System for easy installation
- Nylon wheels and precision ball bearings provide smooth and quiet door operation
- Crowder Frame pocket door kit including header track, header brackets, steel uprights and foot brackets to build
- Cycle tested for up to 150,000 cycles without fail
- ADA Compliant (Barrier-free) design

## COMPLETE 1 DOOR KIT BREAKDOWN



Each kit includes one CP-426 Header Track x length based on kit size, two CP-HB2X6 Header Brackets, two CP-930 Drywall Support x length based on kit size, four Steel Uprights x length based on kit size, two CP-2X6 Foot Brackets, two CC-493 Easy Connect Catch 'N' Close Hangers, two CC-100 Catch 'N' Close In-Track Stops, two Catch 'N' Close Closing Devices, one C-914 Guide Channel x length based on kit size, one CP-913 Pocket Guide and necessary fasteners

CC-75 for doors up to 75 lbs. [34 kg] **CC-1** for doors up to 150 lbs. [68 kg]

#### **Door Width**

18 in [457 mm] to 30 in [762 mm] wide

#### **Door Height**

80 in [2032 mm] to 84 in [2134 mm] or 2150 mm high

92 in [2337 mm] to 96 in [2438 mm] or 2455 mm high

116 in [2947 mm] to 120 in [3048 mm]

### **OPTIONAL**

#### **Door Locks & Pulls**





#### **Add-On Products**




#### CPD-2X6-Joiner Kit

Use for applications where double bi-parting door openings are required. Two single Crowder Frame kits are required in order to use the joiner kit.

Job No./Name **Customer Name Date Provided By** 


Notes




# **TYPE CC-NRW-2X6**




## **COMPLETE ELEVATION VIEW**

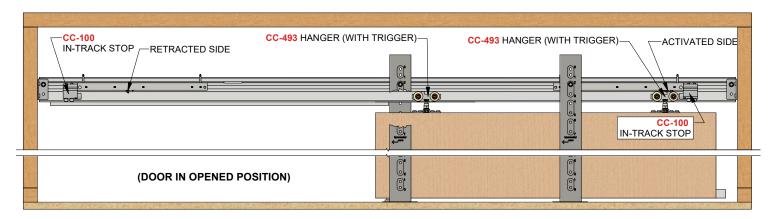

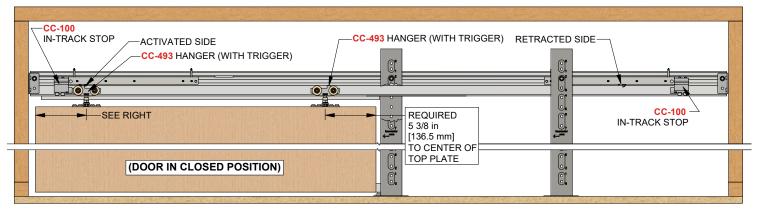

Customer Name	Job No./Name	Date	Provided By


**Notes** 



# **TYPE CC-NRW-2X6**



## PRODUCT DIMENSIONS

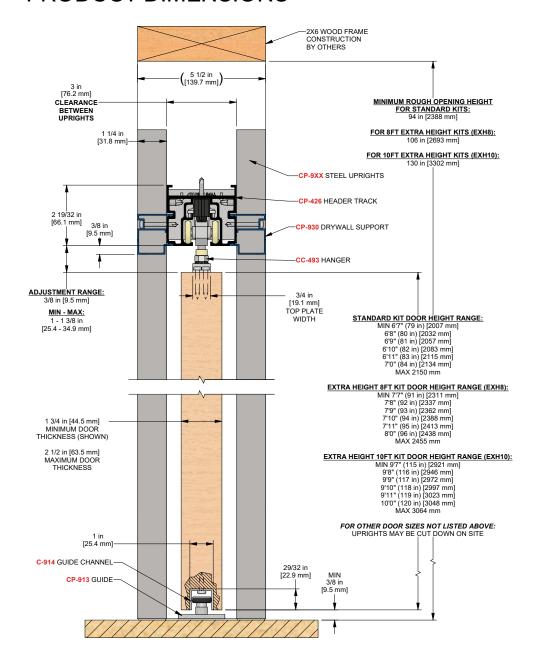

Installation Instructions



Customer Name	Job No./Name	Date	Provided By

**Notes** 

