




MODEL SDL-SG SECURITY LOUVRE

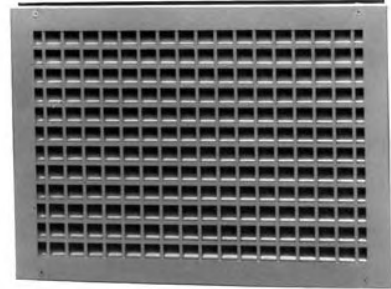

Model SDL-SG

Inverted "Y" Blades with Security Grille

Non-vision two-piece louvre design recommended for schools, class "A" and institutional buildings where vandal-proof design is required.

SDL-SG SPECIFICATIONS

STANDARD SPECIFICATIONS

Material: 18 gauge CRS louvre blades;
12 gauge CRS security grille.

Construction: Security grille on interior and exterior of louvre with 13/16" square openings 1" on center.

Finish: Mineral bronze baked on powder coat.

Door Thickness: 1 3/4" for 1 3/8" doors consult factory

Fasteners: #8-32 phillips head thru bolts with blank head one side.

Free Flow Area: 40% free area.

OPTIONS:


- Material:**
- 20 gauge stainless steel - #4 finish
 - Galvanize S heet for exterior use
 - Electro Zinc Plating for Maximum Corrosion Resist.
 - 16 gauge CRS blade and 10 gauge security grille

- Finish:**
- Baked on powder coat gray prime for field painting,
 - Special order colors. Please provide color chip.

Fasteners: Security fasteners, please specify

Screens: 18-14 mesh insect screen installed in roll formed aluminum frame. Aluminum, bronze or fiberglass mesh available.

Size: _____ " Wide x _____ " high _____ Quantity
(door cut out size equals order size)

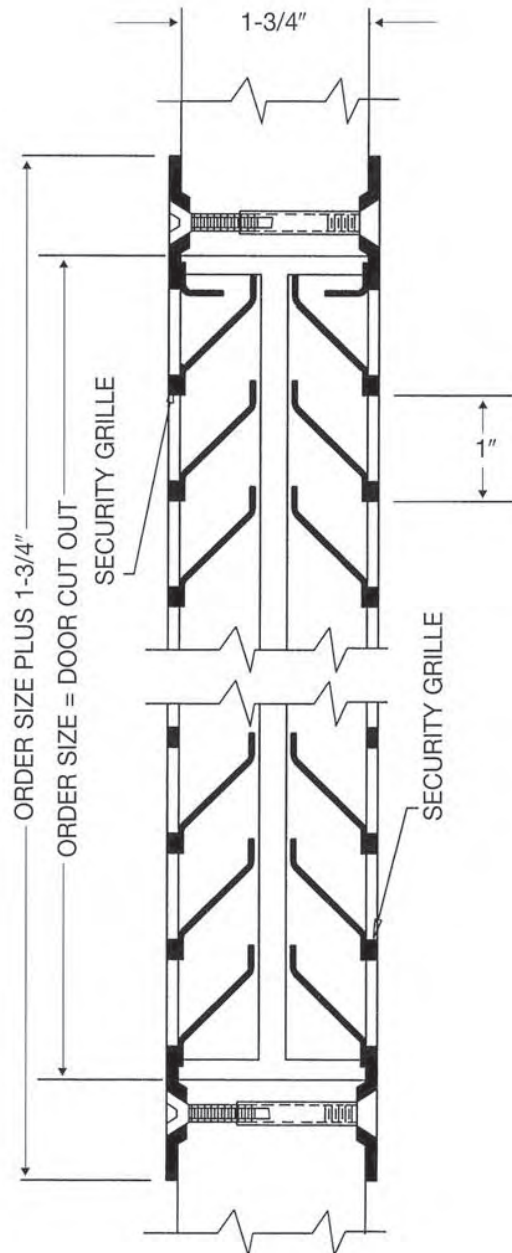

K.N. CROWDER MFG. INC.
 1220 BURLOAK DRIVE
 BURLINGTON, ONTARIO, CANADA, L7L 6B3
 TELEPHONE: 905-315-9788 ---- FAX: 905-315-8090
 TOLL FREE FAX: 1-800-567-0123

K.N. CROWDER INC.
 210 EIGHTH STREET SOUTH
 LEWISTON, NEW YORK, U.S.A. 14092
 TELEPHONE: 1-716-754-8247
 TOLL FREE FAX: 1-800-567-0123