
C-92L-HLDP Privacy Lockset and Pulls Barrier-Free (ADA Compliant)



Included Components Installation Instructions Specifications Case: Heavy gauge wrought Armor Front: Brass, bronze, stainless Dead Bolt: 1/2 in [12.7 mm] thick x 1 7/32 in [31 mm] high x 1 in [25.4 mm] throw Thumb Turn Hub: 3/16 in [4.8 mm] on the diamond Door Thickness: 1 3/8 in [34.9 mm] or 1 3/4 in [44.5 mm] C-90DP C-90HL / C-92L C-90HER / C-90HER-138 Not to scale Lock Body Back-to-Back Door Pulls C-90HL-138 Occupancy Indicator with Handle Lever Coin Turn Emergency Heavy Duty Outside Inside Release SS "Hooks" C-92L 5.5 in [139.7 mm] x 1 in 1.25 in [31.8 mm] 2.75 in [69.9 mm] Unlocked [25.4 mm] faceplate R1/8 in [3.2 mm] or 3.125 in [79.4 mm] square 0 in [25.4 mm] 875 in [123.8 mm] in [104.8 mm] .625 in [92.1 mm] Recommended door pull 10 O by KN Crowder. Available R Ô separately as C-90DP **C-90HL** П or as a complete set as 4.125 C-92L-HLDP ė Locked 0 Φ. Prep for #12 wood or 12-24 C-90HER machine screws Strike Side - 1 in [25.4 mm] 1.125 in 7.75 in [196.9 mm] [28.6 mm] [127 mm] 40 in [1016 mm] -4 in [101.6 mm] TOTAL pocket door opening must 0.125 in [3.2 mm] 1.75 in be 40 in [1016 mm] min. Door must [44.5 mm] .⊆ protrude a min. of 4 in [101.6 mm] to *The ADA Standard 404.2.3* is from the Dept. of Justice ADA ιO attach ADA pocket door hardware** Publication of Sept 15, 2010. KN Crowder encourages the end user (in [1193.8 mm] to double check all state and federal standards for your particular 36 in [914.4 mm]---> project. Pocket door opening must have a clear **The total opening has to be 4 in [101.6 mm] greater than the width of 36 in [914.4 mm] according to federal "Clear Width" dimension to work properly. ADA Standard 404.2.3* ***The bottom of the C-90DP Door Pulls must be installed 34 in 2.625 in 47 [863.6 mm] from the finished floor. This will give 47 in [1193.8 mm] [66.7 mm] 34 in [863.6 mm] to finished floor (max is 48 in [1219.2 mm]) from the finished floor to the top of the C-92L-HL handle, thus meeting Code 404.2.7.




Product Detail

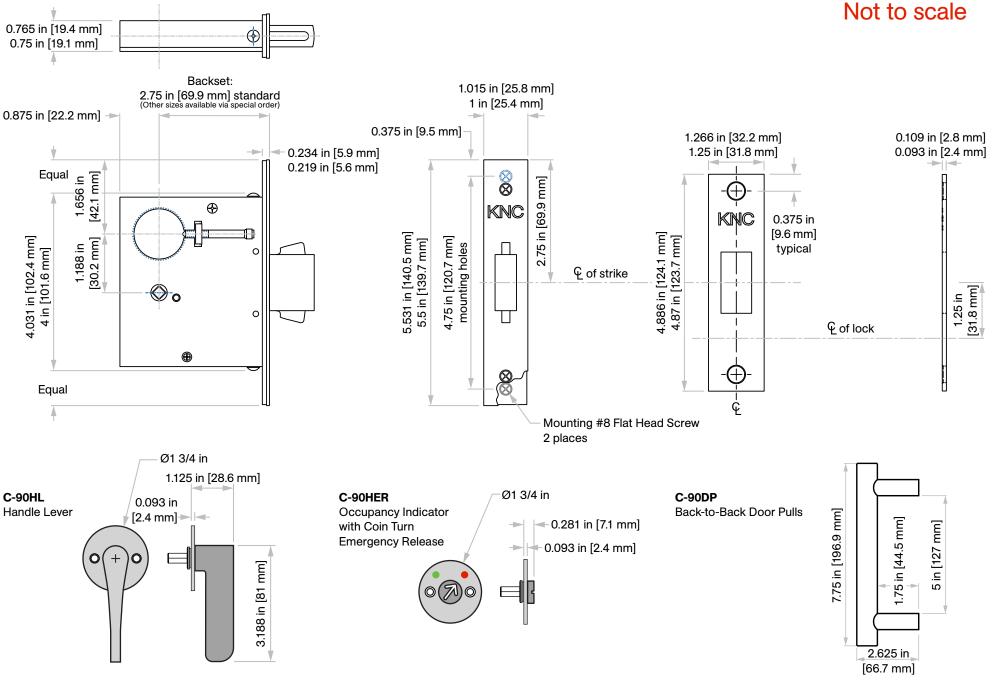

KNCROWDER.COM

1-866-999-1562 PAGE 2 OF 3

Door Prep Template

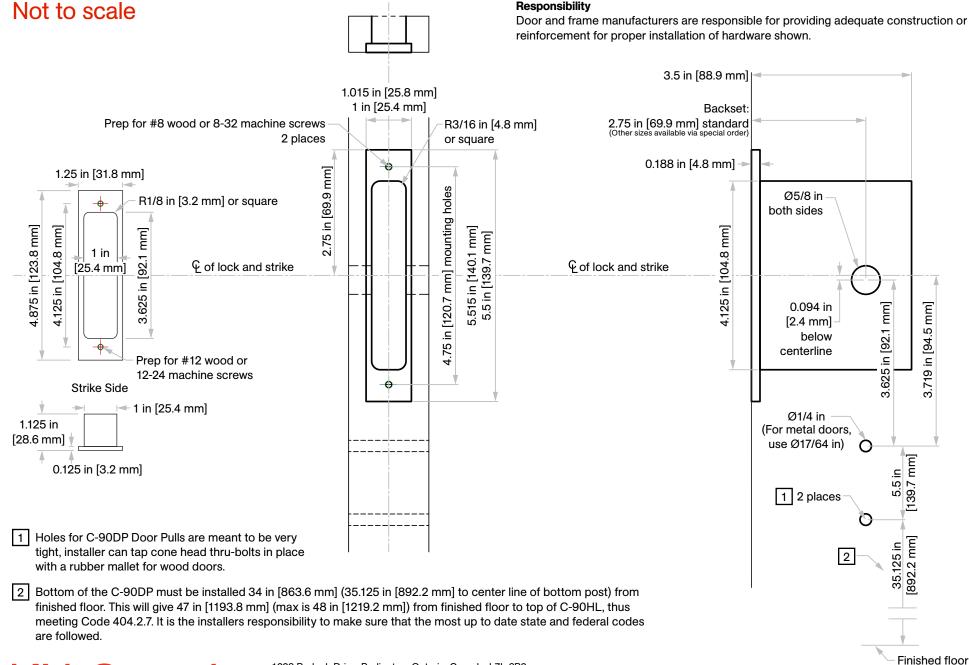

KN Crowder

1220 Burloak Drive, Burlington, Ontario, Canada, L7L 6B3 T. 1–866–999–1562 customerservice@kncrowder.com © 2020-2024 K.N. Crowder Mfg. Inc. All Rights Reserved.