





K.N.CROWDER MFG. INC.

MODEL SDL-V90 INVERTED 'Y' BLADE LOUVER

Model SDL-V90

Inverted "Y" Blades Recommended for Schools, Class "A" and Institutional Buildings.

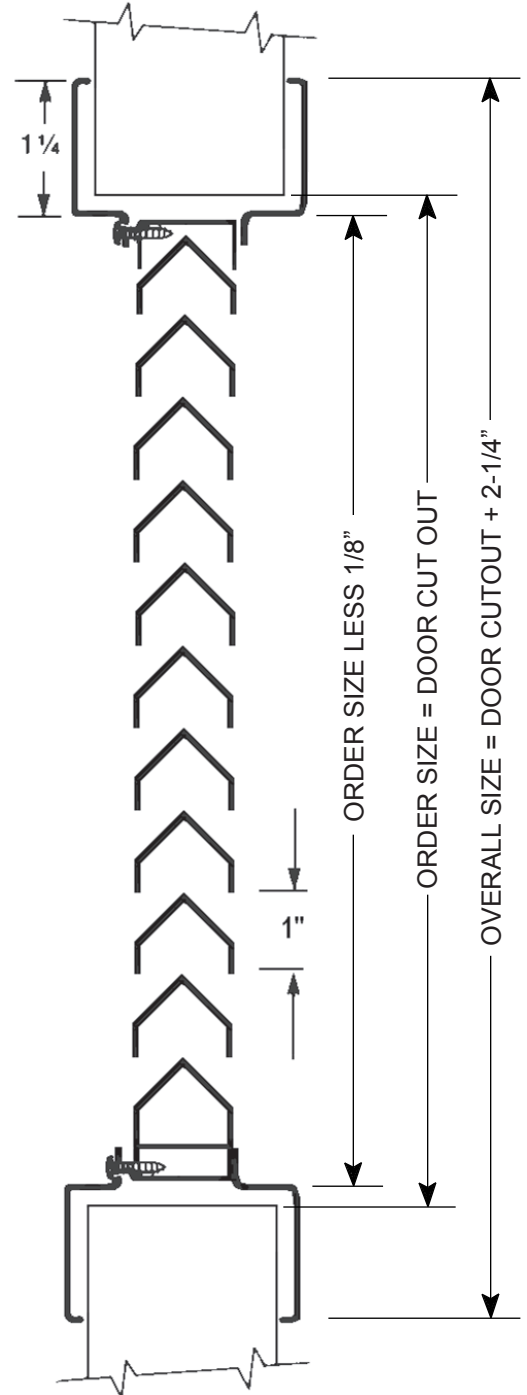

SDL-V90 SPECIFICATIONS

STANDARD SPECIFICATIONS

Material: 18 gauge CRS louvre blades. Min Size 6" x 4", Max 48" x 80".

Construction: Louvers: Inverted "Y" blades with 1" blade spacing are attached by interlocking construction to the 1" deep, welded frame. Non-vision.

SDL-V90 Frame: 1-1/4" trim, mitered and welded corners. Screws fasten through frame into louver core, leaving corridor side of frame free of fasteners.

Finish: Mineral bronze baked on powder coat.

Door: For 1-3/4" door.

Fasteners: Phillips head screws #8 x 1/2"

Free Flow Area: 50% free area.

OPTIONS:

Finishes & Materials: (SS) 18 gauge frame and 20 gauge 304 stainless steel #4 finish

Baked on powder coat gray primer for field painting,

Special order colours. Please provide colour chip.

Fasteners: Security fasteners, please specify

Screen: Nylon mesh insect screen installed in roll formed aluminum frame. Aluminum mesh available.

Size: _____" wide x _____" high _____ Quantity
(DOOR CUT OUT SIZE EQUALS ORDER SIZE)

K.N. CROWDER MFG. INC.
1220 BURLOAK DRIVE
BURLINGTON, ONTARIO, CANADA, L7L 6B3
TELEPHONE: 905-315-9788 ---- FAX: 905-315-8090
TOLL FREE FAX: 1-800-567-0123

K.N. CROWDER INC.
210 EIGHTH STREET SOUTH
LEWISTON, NEW YORK, U.S.A. 14092
TELEPHONE: 1-716-754-8247
TOLL FREE FAX: 1-800-567-0123